



# 2013 SAE Clean Snowmobile Zero Emissions (ZE) Challenge Rules

## Table of Contents

<b>PART A: GENERAL CSC SNOWMOBILE COMPETITION .....</b>	<b>4</b>
<b>INTRODUCTION .....</b>	<b>4</b>
<b>ARTICLE 1: CSC ZERO EMISSIONS CATEGORY OVERVIEW AND COMPETITION.....</b>	<b>4</b>
1.1 EVENT DESCRIPTION.....	4
1.2 COMPETITION OBJECTIVE FOR ZERO EMISSION CATEGORY .....	4
1.3 REGARDING HYBRID SNOWMOBILE DESIGNS .....	5
<b>ARTICLE 2: COMPETITION ELIGIBILITY AND RULES .....</b>	<b>6</b>
2.1 TEAM ELIGIBILITY .....	6
2.2 TEAM MEMBER ELIGIBILITY .....	6
2.3 UNIVERSITY COLLABORATION .....	6
2.4 ENTRIES PER UNIVERSITY .....	6
2.5 REGISTRATION LIMIT – 25 VEHICLES .....	6
2.6 REGISTRATION DEADLINE – DECEMBER 17, 2012.....	6
2.7 INDIVIDUAL PARTICIPANT REQUIREMENTS.....	7
2.8 LIABILITY WAIVER.....	7
2.9 FACULTY ADVISOR .....	7
2.10 UNITED STATES VISAS .....	7
2.11 INTERNATIONAL PARTICIPATION – VEHICLE SHIPPING/US CUSTOMS.....	8
2.12 RULES AUTHORITY .....	8
2.13 RULES VALIDITY .....	8
2.14 RULES COMPLIANCE.....	8
2.15 UNDERSTANDING THE RULES .....	9
2.16 PARTICIPATING IN THE COMPETITION .....	9
2.17 VIOLATIONS OF INTENT .....	9
2.18 RIGHT TO IMPOUND.....	9
2.19 GENERAL AUTHORITY .....	9
2.20 SAE TECHNICAL STANDARDS ACCESS.....	10
<b>ARTICLE 3: INDIVIDUAL REGISTRATION REQUIREMENTS – ACTION REQUIRED .....</b>	<b>10</b>
3.1 SAE MEMBERSHIP .....	10
3.2 INTERNATIONAL STUDENT REGISTRATION.....	10
3.3 ONLINE REGISTRATION .....	10
<b>ARTICLE 4: SNOWMOBILE MODIFICATION .....</b>	<b>11</b>
4.1 BASELINE SNOWMOBILE .....	11
4.2 TORQUE CONTROLLER REQUIREMENTS .....	11
4.3 DRIVE.....	11
4.4 SKIS AND SKI SUSPENSION .....	12
4.5 TRACK, TRACK SUSPENSION, AND TRACTION .....	13
4.6 FRAME AND BODY .....	14
4.7 IGNITION AND ELECTRICAL .....	16
4.8 COMPONENT DELETION.....	18
4.9 FIRE EXTINGUISHERS .....	18
<b>ARTICLE 5: RULE QUESTIONS, DISCUSSION, AND COMMUNICATION .....</b>	<b>18</b>
5.1 QUESTION SUBMISSION.....	18



5.2 LOOPHOLES AND PROBLEMS.....18  
5.3 ENGINEERING ETHICS .....18  
5.4 PARTICIPANTS’ DISCUSSION.....19  
5.5 COMPETITION INFORMATION.....19

ARTICLE 6: CONDUCT OF THE EVENT .....19  
6.1 SNOWMOBILE OPERATING REQUIREMENTS.....19  
6.2 DRIVER PROTECTIVE EQUIPMENT .....21  
6.3 ON SITE MODIFICATIONS (BONUS POINTS AND PENALTIES).....21  
6.4 PERMITTED MAINTENANCE ITEMS .....22  
6.5 DRAFTING PROHIBITED .....23  
6.6 UNSPORTSMANLIKE CONDUCT .....23  
6.7 DRUG AND ALCOHOL POLICY .....23  
6.8 PROTESTS AND PROBLEMS .....23  
6.9 EVENT APPEARANCE AND FORFEITS.....23

ARTICLE 7: DEADLINES.....24  
7.1 REGISTRATION OPENS ON OCTOBER 2, 2012 .....24  
7.2 REGISTRATION CLOSES ON DECEMBER 17, 2012 .....24  
7.3 ELECTRIC SYSTEMS FORM (ESF) DUE JANUARY 13, 2013.....24  
7.4 DESIGN PAPER AND MSRP DUE ON FEBRUARY 23, 2013 .....24

ARTICLE 8: AWARDS .....25  
8.1 AWARD CRITERIA: NOTE: AWARDS ARE CONTINGENT UPON SPONSORSHIP. PAST AWARDS INCLUDE: .....25  
8.2 PARTICIPATION PLAQUE.....26

ARTICLE 9: SCORING.....26  
9.1 OVERALL SCORE.....26  
9.2 EVENT POINTS.....27  
9.3 PENALTIES .....27  
9.4 ENGINEERING DESIGN PAPER .....27  
9.5 MANUFACTURER’S SUGGESTED RETAIL PRICE (MSRP).....28  
9.6 ORAL DESIGN PRESENTATION.....31  
9.7 OBJECTIVE AND SUBJECTIVE NOISE EVENTS .....32  
9.8 OBJECTIVE HANDLING & DRIVABILITY EVENT .....33  
9.9 SUBJECTIVE HANDLING & DRIVABILITY EVENT.....34  
9.10 ACCELERATION PLUS LOAD EVENT .....34  
9.11 COLD START EVENT .....35  
9.12 STATIC DISPLAY EVENT/NETWORKING WITH INDUSTRY .....35  
9.13 SNOWMOBILE WEIGHT .....35

ARTICLE 10: ORGANIZER AUTHORITY.....36

PART B: ELECTRICAL COMPONENT RULES .....36

ARTICLE EV1 ELECTRIC SYSTEM DEFINITIONS .....36  
EV1.1 High-Voltage (HV) and Low-Voltage (LV).....36  
EV1.2 Grounded Low Voltage and Tractive System.....36

ARTICLE EV2 ELECTRIC POWERTRAIN .....37  
EV2.1 Motors.....37  
EV2.3 Torque Control Sensor (Accelerator).....37  
EV2.4 Torque Control Sensor.....37

ARTICLE EV3 TRACTIVE SYSTEM - ENERGY STORAGE.....38



<b>EV3.1</b>	<b>Allowed Tractive System Batteries</b> .....	<b>38</b>
<b>EV3.2</b>	<b>Tractive System Battery Container – General Requirements</b> .....	<b>38</b>
<b>EV3.3</b>	<b>Tractive System Battery Container - Electrical Configuration</b> .....	<b>38</b>
<b>EV3.4</b>	<b>Tractive System Battery Container - Mechanical Configuration</b> .....	<b>39</b>
<b>EV3.5</b>	<b>Battery Isolation Relay(s) (BIR)</b> .....	<b>40</b>
<b>EV3.6</b>	<b>Battery Management System (BMS)</b> .....	<b>40</b>
<b>EV3.7</b>	<b>Grounded Low Voltage System</b> .....	<b>41</b>
<b>ARTICLE EV4 TRACTIVE SYSTEM – GENERAL REQUIREMENTS</b> .....		<b>42</b>
<b>EV4.1</b>	<b>Separation of Traction System and Grounded Low Voltage System</b> .....	<b>42</b>
<b>EV4.2</b>	<b>Positioning of tractive system parts</b> .....	<b>43</b>
<b>EV4.3</b>	<b>Tractive System Isolation</b> .....	<b>43</b>
<b>EV4.4</b>	<b>Grounding</b> .....	<b>44</b>
<b>EV4.5</b>	<b>Tractive System Measuring points (TSMP)</b> .....	<b>44</b>
<b>EV4.6</b>	<b>HV Insulation, wiring and conduit</b> .....	<b>45</b>
<b>EV4.7</b>	<b>Tractive System Enclosures</b> .....	<b>46</b>
<b>EV4.8</b>	<b>HV Disconnect (HVD)</b> .....	<b>46</b>
<b>EV4.9</b>	<b>Activating the Tractive System</b> .....	<b>46</b>
<b>EV4.11</b>	<b>Vehicle Ready Light</b> .....	<b>47</b>
<b>EV4.12</b>	<b>Ready-To-Drive-Sound</b> .....	<b>48</b>
<b>ARTICLE EV5 SHUTDOWN CIRCUIT AND SYSTEMS</b> .....		<b>48</b>
<b>EV5.1</b>	<b>Shutdown Circuit</b> .....	<b>48</b>
<b>EV5.2</b>	<b>Master Switches</b> .....	<b>49</b>
<b>EV5.3</b>	<b>Insulation Monitoring Device (IMD)</b> .....	<b>51</b>
<b>ARTICLE EV6 FUSING</b> .....		<b>51</b>
<b>EV6.1</b>	<b>Fusing</b> .....	<b>51</b>
<b>ARTICLE EV7 ELECTRICAL SYSTEM TESTS</b> .....		<b>52</b>
<b>EV7.1</b>	<b>Insulation Monitoring Device Test (IMDT)</b> .....	<b>52</b>
<b>EV7.2</b>	<b>Insulation Measurement Test (IMT)</b> .....	<b>53</b>
<b>EV7.3</b>	<b>Rain Test</b> .....	<b>53</b>
<b>EV7.4</b>	<b>Ready-To-Drive-Sound Test</b> .....	<b>53</b>
<b>ARTICLE EV8 HIGH VOLTAGE PROCEDURES &amp; TOOLS</b> .....		<b>54</b>
<b>EV8.1</b>	<b>Working on Tractive System Battery Containers</b> .....	<b>54</b>
<b>EV8.2</b>	<b>Charging</b> .....	<b>54</b>
<b>EV8.3</b>	<b>Battery Container Hand Cart</b> .....	<b>55</b>
<b>ARTICLE EV9 ELECTRICAL SYSTEM FORM AND FMEA</b> .....		<b>55</b>
<b>EV9.1</b>	<b>Electrical System Form (ESF)</b> .....	<b>55</b>
<b>EV9.2</b>	<b>Failure Modes and Effects Analysis (FMEA)</b> .....	<b>56</b>
<b>ARTICLE T11</b> .....		<b>56</b>
<b>ACRONYMS</b> .....		<b>56</b>
<b>APPENDIX A</b>	<b>SNOWMOBILE DESCRIPTION FORM</b> .....	<b>57</b>
<b>APPENDIX B</b>	<b>SAE CSC 2013 ENGINEERING DESIGN PAPER JUDGING FORM ZERO EMISSIONS SLEDS ONLY</b> ....	<b>58</b>
<b>APPENDIX C</b>	<b>SAE CSC 2013 ORAL PRESENTATION JUDGING FORM FOR ZE SLEDS</b> .....	<b>59</b>
<b>APPENDIX D</b>	<b>SAE CSC 2013 HANDLING EVENT JUDGING FORM FOR ZE SLEDS</b> .....	<b>60</b>
<b>APPENDIX H</b>	<b>CSC 2013 INSPECTION FORMS</b> .....	<b>61</b>
<b>APPENDIX S</b>	<b>SAE TECHNICAL STANDARDS</b> .....	<b>62</b>



## PART A: GENERAL CSC SNOWMOBILE COMPETITION

### Introduction

This introduction is intended to highlight some areas of the 2013 SAE Clean Snowmobile Zero Emissions (ZE) Challenge Rules that you may find of interest. Each year the CSC Rules Committee changes the rules to introduce a slightly different engineering challenge. This set of the CSC Rules applies only to the ZE category. A separate document has been written for the Internal Combustion (IC) rules. Areas of commonality in the two categories are duplicated in each document.

**Caution:** Neither this Introduction nor any Summary of the Rules is a substitute for thoroughly reading and understanding the CSC Rules. Read the Rules thoroughly and carefully.

## ARTICLE 1: CSC ZERO EMISSIONS CATEGORY OVERVIEW AND COMPETITION

### 1.1 Event Description

The SAE International Clean Snowmobile Challenge is an engineering design competition for college and university student members of SAE International, organized and administered by SAE and Michigan Technological University. The snowmobiles will compete in a variety of events including range, draw bar pull, acceleration plus load, handling, static display, cold start, and design.

There are two categories in the SAE Clean Snowmobile Challenge, sleds driven by only one Internal Combustion (IC) engine and sleds driven by electrical power and thus have Zero Emissions (ZE). **No hybrid designs will be allowed to compete.** Teams wishing to compete in a hybrid vehicle competition are encouraged to consider the SAE Formula Hybrid competition. This document covers only the Zero Emissions category of CSC.

Please read through the rules completely and designate someone from your team to monitor the CSC Forum on the SAE website for updates and changes. Your team is responsible for following all the rules. For information regarding past competitions there are several SAE papers available written by the competition organizers as well as participating teams. These papers are easily found by searching the SAE website [www.sae.org](http://www.sae.org) or [www.mtukrc.org](http://www.mtukrc.org)

### 1.2 Competition Objective for Zero Emission Category

The intent of the competition is to develop a snowmobile that could be used in areas of remote, research testing locations such as Summit Station in Greenland for the National Science Foundation (NSF) research. The Greenland Ice Cap acts like a sponge, absorbing atmospheric chemicals produced naturally, or via anthropogenic activities. Many of these chemicals are also photoactive in the lower troposphere and even in the upper layers of the snow. Research at Summit Station seeks to understand the processes involved and how they might play into the global cycling of these agents. Some of the chemical constituents under study are measured in parts per billion. Emissions resulting from the burning of fossil fuels on site can hopelessly skew the research results. Due to the sensitive nature of much of the research conducted at Summit Station, NSF seeks to find a “zero-emissions” vehicle for transporting researchers and support staff to and from research sites.

Electric snowmobiles or other forms of zero-emissions transportation have long been sought. Range and performance have always been extremely limiting factors that have precluded the successful development of commercially available models. Recent advancements in battery and motor technology have finally made it possible to realize vehicles with ranges adequate for some purposes. Zero-emissions personal transportation would allow the operation of more distant satellite camp facilities and allow access to areas previously accessible only by foot. In short, this is a tool that the research community needs now.

Snowmobiles in this category must be zero-emissions by default. Therefore, no test or points will be given for emissions. Instead, range and draw bar performance will be measured. Innovation will also be judged in this category.

### 1.3 Regarding Hybrid Snowmobile Designs

Hybrid vehicle designs are becoming increasingly popular in the marketplace. It is inevitable that recreational vehicles manufacturers will someday consider hybrid designs as costs of these systems decrease. At the current time however energy storage technologies and hybrid control electronics make for expensive solutions in the snowmobile market. It is unlikely that snowmobiles that are much more expensive will displace conventional IC designs in the near future, especially if those designs lack the performance expected in the recreational market.

Hybrid snowmobile designs are not be permitted in the competition. A hybrid snowmobile is defined as a snowmobile that can be propelled with two separate forms of energy, for example gasoline and/or electricity in any combination.

Future CSC competitions may include an extended range electric snowmobile category. The goal of this category would be to serve markets where zero emissions and/or low noise are desired but an on-board engine-generator would acceptable to provide emergency power and/or extended range.

For CSC 2013, a **paper-only competition** for an electric snowmobile with an on-board range extender design will take place. Design papers will be reviewed by experts in snowmobiles and hybrid electric systems. A cash prize of \$1000 and a plaque will be presented to the best design paper. The guidelines for this paper are as follows:

1. The Extended Range Electric Snowmobile (ERES) will essentially be an electric snowmobile meeting all the requirements of the Zero Emissions category of the Clean Snowmobile Challenge 2013 rules. The difference will be the addition of an on-board up to 50 hp (37.285 kW) internal combustion engine that will recharge the battery.
2. The design of the snowmobile must include physically realizable off-the-shelf components. References for components used and proof of availability must be provided in the paper.
3. Charging would only be allowed when the snowmobile is not moving. In other words, this would be an on-board charging system, not a series hybrid design.
4. The design paper must meet all the requirements of the Zero Emissions design paper described later in these rules.
5. A schematic diagram is required.
6. An analytical model and an analysis of the performance of the ERES is required in the following duty cycle:
  - a. Travel 20 miles (32.19 km) at 20 mph (32.19 km/hour).
  - b. Recharge with the IC engine for 30 minutes.



- c. Predict the extended distance the sled will travel at 20 mph (32.19 km/hour).

**Question regarding this paper-only competition must be submitted to the CSC Forum.**

## ARTICLE 2: COMPETITION ELIGIBILITY AND RULES

### 2.1 Team Eligibility

Registration for the Clean Snowmobile Challenge is limited to teams of undergraduate and graduate students from accredited universities. High school teams are prohibited.

### 2.2 Team Member Eligibility

Undergraduate participation is strongly encouraged. Graduate student participation is allowed, but limited to no more than 25% of the undergraduate participation on any individual team.

### 2.3 University Collaboration

Collaboration between schools will be accepted if both schools meet all requirements stated in these rules.

### 2.4 Entries per University

Registration for the Clean Snowmobile challenge is limited to one vehicle per university in each of the two categories, IC engine and Zero Emissions.

### 2.5 Registration Limit – 25 Vehicles

Registration for the Clean Snowmobile Challenge is limited to 25 snowmobiles (IC and ZE combined).

### 2.6 Registration Deadline – December 17, 2012

Registrations will be accepted in the order in which they are received starting at 10:00 am EDT October 2, 2012 and ending at 11:59 pm EST December 17, 2012 **or** when 25 teams have registered, whichever occurs first.

The registration fee must be paid on-line by credit card at the time of registration. Registration fees may not be paid by any other means.

There is **no** late registration and there are **no exceptions** to this registration policy. Registration fees are not refundable.

To complete the registration process, teams must submit the mandatory required information below after completing online process.

#### 1. Team Program Information

Team program information will be uploaded to <http://www.mtukrc.org/send.htm> at the time of registration. The following is required:

- Name of Faculty Advisor(s)
- Name(s) of Team Leader(s)
- Names of Team Members
- Fuel choice (Flex-fuel ethanol or flex-fuel diesel)

#### 2. Current Team Photo (optional)





The photograph will be printed in the program on a page measuring 5.5 by 8.5 inches. The photograph will typically be 4 to 4.5 inches wide by 2 or 3 inches tall. The required resolution is 300 pixels per inch when printed on paper. If no photo is provided the organizers will decide what will be on the team page.

**NOTE:** Pictures that look good on computer screens look different on paper. When in doubt, use the highest resolution the camera or scanner will allow.

## **2.7 Individual Participant Requirements**

Individual members of teams participating in this competition must satisfy the following requirements:

- A. Student Status:** Team members must be enrolled as degree seeking undergraduate or graduate students. Team members who have graduated during the seven (7) month period prior to the competition remain eligible to participate.
- B. SAE Membership:** Team members must be members of SAE. Proof of SAE membership is required at the event. Students may join SAE online at: [www.sae.org/students](http://www.sae.org/students).
- C. Age**  
Team members must be at least eighteen (18) years of age.
- D. Driver's License**  
Team members who will drive a competition vehicle at any time during a competition must hold a valid, government issued driver's license.
- E. Medical Insurance**  
Individual medical insurance coverage is required and is the sole responsibility of the participant.

All student participants and faculty advisors **MUST** present proof of medical insurance coverage that is valid in United States.

## **2.8 Liability Waiver**

All on-site participants, including students, faculty and volunteers, are required to sign a liability waiver upon registering on-site.

## **2.9 Faculty Advisor**

Each team is expected to have a Faculty Advisor appointed by the university. The Faculty Advisor is expected to accompany the team to the competition and will be considered by competition officials to be the official university representative.

Faculty Advisors may advise their teams on general engineering and engineering project management theory, but may not design any part of the vehicle nor directly participate in the development of any documentation or presentation. Additionally, Faculty Advisors may neither fabricate nor assemble any components nor assist in the preparation, maintenance, testing or operation of the vehicle.

In Brief – Faculty Advisors may not design, build, or repair any part of the snowmobile.

## **2.10 United States Visas**

Teams requiring visas to enter to the United States are advised to apply at least sixty (60) days prior to the competition. Although most visa applications seem to go through without an



unreasonable delay, occasionally teams have had difficulties and in several instances visas were not issued before the competition.

## **2.11 International Participation – Vehicle Shipping/US Customs**

SAE & the Clean Snowmobile Challenge organizers strongly recommend that international teams ship their vehicle(s) early to allow enough time to compensate for any delays that may occur in clearing U.S. Customs. Please check with the United States Customs Service concerning the regulations governing the temporary importation of vehicles. You may want to consider using the services of a freight forwarder who is familiar with the international shipping of vehicles.

SAE staff and the Clean Snowmobile Challenge Event organizers are not permitted to provide advice on U.S. Customs matters.

### **2.11.1 Vehicle Shipping**

Vehicle shipments by commercial carrier must comply with the laws and regulations of the nations from which, and to which, the snowmobile is being sent. Teams are advised to consult with their shipping company or freight forwarder to be sure that their shipment fully complies with all relevant customs, import/export and aviation shipping requirements.

## **2.12 Rules Authority**

The SAE Clean Snowmobile Challenge Rules are the responsibility of the SAE Clean Snowmobile Rules Committee and are issued under the authority of the SAE Collegiate Design Series Committee. Official announcements from SAE and/or the organizers shall be considered a part of, and shall have the same validity as, these rules.

Ambiguities or questions concerning the meaning or intent of these rules will be resolved by the SAE Clean Snowmobile Rules Committee, SAE or by the competition organizer as appropriate.

## **2.13 Rules Validity**

The SAE Clean Snowmobile Challenge Rules posted in the SAE website and dated for the calendar year of the competition are the rules in effect for the competition. Rules sets dated for the other years are invalid.

## **2.14 Rules Compliance**

By entering the Clean Snowmobile Challenge competition the team, members of the team as individuals, faculty advisors and other personnel of the entering university agree to comply with, and be bound by, these rules and all rule interpretations or procedures issued or announced by SAE, the Clean Snowmobile Challenge Rule Committee and the other organizing bodies. All team members, faculty advisors and other university representatives are required to cooperate with, and follow all instructions from, competition organizers, officials and judges.

Each team must appoint a team member to be the “Rules and Safety Officer (RSO)”.  
The RSO must:

- Be present at the entire CSC event.
- Be responsible for understanding the CSC rules prior to the competition and ensuring that competing vehicles comply with all CSC rules requirements.



- System Documentation – Have vehicle designs, plans, schematics and supporting documents available for review by the officials as needed.
- Component Documentation – Have manufacturer’s documentation and information available on all components of the electrical system.
- Be responsible for team safety while at the event.
  - This includes issues such as:
    - Use of safety glasses and other safety equipment.
    - Control of shock hazards such as charging equipment and accessible high voltage sources.
    - Control of fire hazards such as fuel, sources of ignition (grinding, welding etc.).
    - Safe working practices (lock-out/tag out, clean work area, use of jack stands etc.)
    - Be the point of contact between the team and FH organizers should rules or safety issues arise.
- Preferably, this will be the team's faculty advisor or a member of the university's professional staff, but the position may be held by a student member of the team.
- Contact information for the RSO (Name, Cell Phone number, etc.) must be provided to the organizers at registration.

## 2.15 Understanding the Rules

Teams, team members as individuals and faculty advisors, are responsible for reading and understanding the rules in effect for the competition in which they are participating. The section and paragraph headings in these rules are provided only to facilitate reading: they do not affect the paragraph contents.

## 2.16 Participating in the Competition

Teams, team members as individuals, faculty advisors and other representatives of a registered university who are present on-site at a competition are considered to be “participating in the competition” from the time they arrive on-site until they depart at the conclusion of the Clean Snowmobile Challenge or otherwise withdraw from the event.

## 2.17 Violations of Intent

The violation of the intent of a rule will be considered a violation of the rule itself. Questions about the intent of a rule may be addressed to the Clean Snowmobile Challenge Rules Committee or by the individual competition organizers as appropriate.

## 2.18 Right to Impound

SAE and other competition organizing bodies reserve the right to impound any onsite registered vehicles at any time during a competition for inspection and examination by the organizers, officials and technical inspectors.

## 2.19 General Authority

SAE and the competition organizing bodies reserve the right to revise the schedule of any competition and/or interpret or modify the competition rules at any time and in any manner that is, in their sole judgment, required for the efficient operation of the event.



## 2.20 SAE Technical Standards Access

A cooperative program of SAE's Education Board and Technical Standards Board is making some of SAE's Technical Standards available to teams registered for any North American Collegiate Design competition at no cost. The Technical Standards referenced in the Collegiate Design Series rules, along with other standards with reference value, will be accessible online to registered teams, team members and faculty advisors. To access the standards (1) your team must be registered for a competition in North America and (2) the individual team member or faculty advisor wanting access must be linked to the team in SAE's system.

Access Procedure - Once your team has registered there will be a link to the technical standards titled "Design Standards" on the main registration screen where all the required onsite insurance information is added. On the technical standards webpage you will have the ability to search standards either by J-number assigned or topic of interest such as brake light.

A list of the accessible SAE Technical Standards can be found in Appendix S.

## ARTICLE 3: INDIVIDUAL REGISTRATION REQUIREMENTS – ACTION REQUIRED

### 3.1 SAE Membership

All students and faculty, both domestic and international, if you have an SAE International membership, make sure you are affiliated to your respective school/ college/ university on the SAE website under your "MySAE". If you have problems affiliating yourself online; please contact [CollegiateCompetitions@sae.org](mailto:CollegiateCompetitions@sae.org).

- 3.1.1 If you are not a member of SAE International or other approved societies, you will need to join SAE International online at [www.sae.org](http://www.sae.org). Select the "Join SAE / Membership Renewal" link under "Quick links", and then select the "Join SAE" link under "Join SAE International". Students will need to select the "Student Membership" link and then follow the series of the questions that are asked. Faculty that wishes to be SAE members should choose the "Professional Membership" link and proceed to the series of questions. **Please note all student participants must be SAE International members to participate in the event.** It is not mandatory for faculty to join.

### 3.2 International Student Registration

All international student participants (or unaffiliated faculty advisors) who are not SAE International members are required to complete the International Student Registration form for the entire team found in the specific event registration webpage. Upon completion, email the form to [CollegiateCompetitions@sae.org](mailto:CollegiateCompetitions@sae.org) stating which event and university name.

### 3.3 Online Registration

**Online registration information is required!** Every participant, including advisors must affiliate themselves and complete the following information on under the team's registration page on the SAE website:

- Medical insurance (provider, policy/ID number, telephone number)
- Driver's license (state/country, ID number)



- Emergency contact data (point of contact (parent/guardian, spouse), relationship, and phone number)

To do this you will need to go to “Registration” page under the specific event the team is registered and then click on the “Register Your Team / Update Team Information” link. At this point, if you are properly affiliated to the school/college/university, a link will appear with your team name to select. Once you have selected the link, the registration page will appear. Selecting the “Add New Member” button will allow individuals to include themselves with the rest of the team. This can also be completed by team captain and faculty advisor for all team members.

PLEASE BRING YOUR OFFICIAL DRIVER’S LICENSE OR PASSPORT TO ONSITE REGISTRATION. ALSO PLEASE BRING YOUR MEDICAL INSURANCE CARD.

All students, both domestic and international, must affiliate themselves online or submit the International Student Registration form by February 23, 2013. For additional assistance, please contact [CollegiateCompetitions@sae.org](mailto:CollegiateCompetitions@sae.org).

## ARTICLE 4: SNOWMOBILE MODIFICATION

### 4.1 Baseline Snowmobile

Teams will provide their own snowmobile for modification. The baseline snowmobile must be a stock qualified snowmobile, defined as a model that was produced in a quantity of at least 500 units. **The model year of the base snowmobile must be from the model years 2006 to 2013 inclusive.**

**The intent of the competition is for student teams to modify an existing snowmobile to include a motor and batteries.**

### 4.2 Torque Controller Requirements

The thumb actuated torque controller must remain on the right side of the handlebar consistent with modern snowmobiles. An adequate return spring is required. Drive-by-wire systems are allowed.

### 4.3 Drive

#### 4.3.1 Transmission

The requirement for a variable ratio belt transmission will be waived for electric drive designs.

#### 4.3.2 Brake Performance Requirement

All brake modifications are subject to retaining the braking performance of the original snowmobile. This will be tested during the technical inspection before snowmobiles are allowed to compete in the competition.

The master cylinder, caliper and rotor assembly must be commercially available.

The "commercially available" stipulation can be accomplished two ways. Other brake systems, for example motorcycle, small tractors, and other off-road vehicles may use smaller diameter brakes. The concern is mainly one of material specifications for the parts. Commercially

available systems will most likely satisfy some quality standard for the caliper and rotor assembly regarding the durability of the parts.

The second way is to reduce the rotor diameter of a commercially available system. At least then you have started with parts that again satisfy some material standard. In stopping snowmobiles, usually the brakes lock up and the snowmobile slides on the snow, so there is plenty of clamping force available. A fifteen percent (15%) reduction in surface area will probably not change this.

Brake rotor on drive axle track shaft must be at least seven (7) inches minimum diameter. If the secondary brake is on the track shaft, the rotor may be smaller than seven (7) inches. Additional brake assemblies may be added. Axle shaft may be lengthened to accommodate additional brakes.

Moving the brake to the track drive axle is allowed. The brake components must be commercially available and the pad contact area cannot be reduced by more than fifteen percent (15%).

Replacement brake rotor of aluminum or carbon fiber is not allowed.

#### 4.3.3 Brake Control Handle

The brake control handle must remain in the OEM location (front left side). Brakes must be operative at all times.

#### 4.3.4 Brake Rotor Shield

If the brake system is standard as supplied by the manufacturer, no additional brake rotor shield is required. If the brake system is modified, the brake rotor must be covered with a shield capable of retaining an accidental explosion.

#### 4.3.5 Rotor Contact Area

The rotor pad contact surface area may not be reduced more than fifteen percent (15%) of the original pad contact surface area.

#### 4.3.6 Moving Parts Isolation

Chains, pulleys, and exposed moving parts will be isolated from the driver and other competitors by shields capable of retaining all accidental explosions and component impacts. No holes may be drilled in protective shields.

### 4.4 Skis and Ski Suspension

#### 4.4.1 Ski Requirements

Skis must be commercially available.

#### 4.4.2 Ski and Ski Suspension Modification

The snowmobile's skis and ski suspension may be modified. However, the snowmobile must remain ski-steered.

#### 4.4.3 Ski Runners

Carbide ski runners are allowed.

#### 4.4.4 Ski Suspension Requirements

The following measurement procedure will be used to verify ski suspension travel. A measuring stick will be placed at the front nose of the snowmobile. The snowmobile will be lifted to the point of the full extension of the ski suspension. This point on the measuring stick will be noted as "Point A." Weight will be added to the snowmobile to push the ski suspension down to full compression of the suspension. This point will be noted on the measuring stick as "Point B." The total travel is the distance from "Point A" to "Point B."

The total travel must be equal to or greater than six (6) inches.

The heaviest driver will then sit on the sled. With the heaviest driver sitting on the sled in the normal driving position there must be a minimum of two (2) inches of travel downward to reach "Point B."

If this condition is not met, the team must modify the snowmobile to meet this requirement.

Changes in suspension to accommodate heavier and lighter riders will be allowed provided the suspension travel rule is maintained. There will be no loss of the 100 point "No Maintenance Rule" for suspension height adjustments for rider weight.

### 4.5 Track, Track Suspension, and Traction

#### 4.5.1 Track and Track Suspension Modification

The snowmobile's track may be replaced with a different track. The track must be a commercially available, one piece, molded rubber snowmobile track. The selected, commercially available track may not be modified except for traction studs. The same track design must be used for all events.

Commercially available pre-studded tracks are allowed.

#### 4.5.2 Track Suspension Requirements

The following measurement procedure will be used to verify track suspension travel. A measuring stick will be placed at the rear of the snowmobile. The snowmobile will be lifted to the point of the full extension of the track suspension. This point on the measuring stick will be noted as "Point C." Weight will be added to the snowmobile to push the ski suspension down to full compression of the track suspension. This point will be noted on the measuring stick as "Point D." The total travel is the distance from "Point C" to "Point D."

The total travel must be equal to or greater than six (6) inches.

The heaviest driver will then sit on the sled. With the heaviest driver sitting on the sled in the normal driving position there must be a minimum of two (2) inches of travel downward to reach "Point D."

If this condition is not met, the team must modify the snowmobile to meet this requirement.

#### 4.5.3 Traction Control Devices

The use of traction control devices such as ice grousers, grass hooks, or paddles is not allowed.

The use of track studs is allowed.

Regardless of track length or width, the snowmobile is limited to two (2) commercially available studs per bar, 60 degree unsharpened, unmodified single point studs (see example picture below).



All components of the traction devices must be located in the center of the track between the inside edges of the two slide runners and a minimum of 3.75 inches from the edge of the track.

The stud may not protrude more than .375 inch above the highest point on the track.

Stud backing plate maximum size is 2 inches x 2.25 inches.

Backing plates may not extend beyond the height of the rib and must rest against the rib. Sharpening (vertically or horizontally) of the backing plate is not allowed.

- 4.5.4 International Engineering, Inc. (Woody's) is the official supplier for traction studs for CSC and they are available for technical assistance in track stud installation. Teams choosing to use track studs must contact Woody's prior to the Challenge to ensure proper track stud selection and installation.

The contact at Woody's is Mark Musselman [mark@wiem.com](mailto:mark@wiem.com) (989) 689-4911 ext. 108

#### 4.5.5 Slide Runner

Slide runners may be drilled. OEM type slide runners may be used as a replacement. Inserts may be added to the slide runner. The slide rail lubrication system (ice scratchers) will be allowed this year. Only ice scratchers that do not have to be stowed when in reverse like the Slidekick design will be allowed.

#### 4.5.6 Maximum Track Lug Height

The maximum height of track lugs is two (2) inches.

### 4.6 Frame and Body

#### 4.6.1 Rear Snow Flap

A Rear snow flap is required.

If a team's base sled is a "touring" sled designed to travel on groomed snowmobile trails then the stock rear snow flap as provided by the manufacturer is acceptable. Off road or "mountain" sleds typically have rear snow flaps designed for that purpose and are much higher off the ground and are not acceptable. The rear snow flap design could affect the noise of the snowmobile. For this reason, we encourage innovation in this area. Here are some guidelines to follow should your team decide to design your own rear snow flap.



- 1) Be securely fastened to the tunnel or chassis (a snow flap that falls off or is inadequately held on to the snowmobile during competition will incur penalties for safety and repair).
- 2) Be wider than the track of the snowmobile. Tapered or shaped snow flaps are allowable provided that the narrowest point is wider than the track.
- 3) Be in close proximity (one inch or less) to the ground when the lightest operator is on the machine.
- 4) Be adequately rigid (or massive) to remain in close proximity with the ground during high-speed operation.
- 5) Be adequately supported so that the flap does not get drawn into the track during reverse maneuvers (if so equipped).

Snow flaps in question will be dynamically tested. Snow flaps that are deemed to not meet the above criteria will not be allowed.

Snow flaps from prior year competition do not necessarily meet the above requirements and are not “grandfathered in”.

#### 4.6.2 Foot Stirrups/Pegs

Foot stirrups/foot pegs constructed of rigid materials may be installed.

#### 4.6.3 Seat

All sleds will be equipped with an upholstered, padded seat with a minimum thickness of one (1) inch, a length of twenty-four (24) inches, and a width of the tunnel.

#### 4.6.4 Body Modification

The snowmobile body may be modified. The hood must have top and side cowling and must contain at least one thousand three hundred (1300) square inches.

#### 4.6.5 Front Bumper Requirement

All snowmobiles must have a front bumper strong enough to support the snowmobile while suspended in mid-air (for ease of lifting).

#### 4.6.6 Decal Space Requirement

Two hundred (200) square inches of space must be left free on the hood/tunnel of the snowmobile for sponsorship decals to be placed upon arrival to the competition.

#### 4.6.7 Team Number

The team number must appear in at least four (4) places on the snowmobile: Both sides of the hood and both sides of the tunnel. (A) The numbers on the hood sides must be six (6) inches high,  $\frac{3}{4}$  inches wide. (B) The numbers on both sides of tunnel, minimum of four (4) inches high.

All numbers must be in contrasting colors and easy to read.

Team numbers will be assigned by SAE upon registration according to SAE policy.

#### 4.6.8 Chassis Modification


The snowmobile chassis (bulkhead and tunnel) must be from a stock qualified snowmobile (a snowmobile that was produced in a quantity of at least 500 units). Teams are not permitted to

build their own chassis from the ground up. No modifications may be made to the snowmobile chassis that will reduce structural integrity.

If a team makes modifications to the snowmobile chassis, they will be required to explain to the Technical Inspector what steps (including computer modeling and analysis) were taken to ensure structural integrity and durability.

#### 4.6.9 Rear Hitch Requirement

Both IC and ZE sleds must have a rear hitch capable of a 0.375 inch pin connection (must have clearance for a 3/8 inch pin) providing at least +45 to -45 degrees of yaw rotation about the pin. The hitch must have flap or pitch rotation of +45 to -45 degrees of rotation. Roll degree of freedom is not required. The hitch must be rigid in fore-aft tension and compression and be capable of withstanding 800 pounds draw bar pull force. Pictured below is an example of a snowmobile hitch. These may be fabricated or purchased.

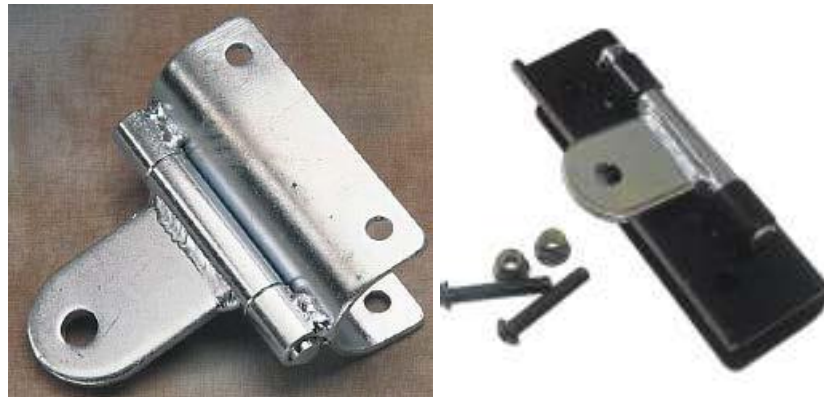

### 4.7 Ignition and Electrical

#### 4.7.1 Disconnect Tether

All machines must be equipped with a disconnect tether that is operable at all times. Disconnect tethers must be used and attached to the operator whenever the High Voltage is engaged. The tether must be connected around the operator's wrist (not to his glove or jacket). No alligator clips are allowed. Maximum tether cord length will be five (5) feet. Verification of the tether cord length will be determined at tether cord's fully extended length. The tether switch will be securely mounted in a location on the snowmobile other than on the handlebars.

#### 4.7.2 Shutdown Switch

All snowmobiles must have a handlebar mounted button (on/off) shutdown switch on the right side within thumb reach (in addition to the tether switch). The shutdown switch must be configured so pushing down on the switch will shut down the power to the sled. In other words, up equals "on" and down equals "off."

The reason for this type of shutdown switch is to provide a common safety feature for judges and organizers on all the competing sleds. In the event of an emergency, drivers as well as judges and organizers should all know how to disable a snowmobile.

Below are examples of available shutdown switches that meet the requirements:

(A) 01-171 Ski-Doo shutdown switch available at  
<http://www.mfgsupply.com/m/c/01-171.html?id=UxSI4Vzn>



(B) After market WPS#27-0152 or 27-0124  
<http://www.parkeryamaha.com/index.asp?PageAction=PRODSEARCH&txtSearch=27-0152&Page=1>



(C) A Stock Polaris # 4110106



#### 4.7.3 User Selection Switches

Non-standard user selection switches must be identified.

#### 4.7.4 Battery Box Requirements for batteries other than those used for traction.

Batteries used other than those used for traction must be fully enclosed in a vented, non-conductive box. The purpose of this box is two-fold. First, for unsealed batteries, the box will prevent an acid spill in the event of an accident or "unusual attitude". And second, for all batteries, the non-conductive box will prevent the positive and negative terminals of the battery from contacting conductive material and/or sparking and starting a fire (in case of an accident).

**NOTE:** Venting typically consists of a 1/8" rubber line vented out the bottom of the snowmobile. Battery boxes may be lined with non-conductive material, but the lining must be secure enough to serve its purpose in an accident and/or unusual attitude. Positive terminal must be shielded. Battery box must be securely held in place.

The stock battery box is acceptable if and only if it is modified to meet the above requirements.

There are no exceptions to this requirement. If the technical inspectors are not satisfied that this modification has been made properly, the sled will not compete.

#### 4.7.5 Head, Tail, and Brake Light Requirement

All snowmobiles are required to have functional head, tail, and brake lights. Head lights should provide adequate lighting to allow safe operation in complete darkness at speeds up to

45 miles per hour. Snowmobiles that do not meet these criteria can be penalized and/or ruled ineligible for any events conducted at night.

#### 4.8 Component Deletion

No changes are allowed that would nullify compliance with federal, state, or provincial safety regulations.

#### 4.9 Fire Extinguishers

Each team must have two (2) 0.9 kg (2 lb.) ABC dry chemical/dry powder or 1.75 liters Aqueous Film Forming Foam (AFFF), fire extinguishers. One must be mounted on the rear of the sled and be easily accessible by course workers. The manufacturer mounts must be used; they must be metal and have a metal draw latch. This mount must be securely fastened to the vehicle frame and it must resist shaking loose over rough terrain, while allowing the course workers to remove it easily if necessary. The second must be brought to technical inspection with mounting accessories; it will be used as a replacement if needed. All fire extinguishers must be equipped with a manufacturer installed dial pressure gauge. The gauge must be readable and indicate a full charge. Extinguishers of larger capacity are acceptable. Except for the initial inspection, one extinguisher must readily be available in the team's paddock area, and the second must accompany the vehicle wherever the vehicle is moved. Both extinguishers must be presented with the vehicle at Technical Inspection. Fire extinguishers must be labeled with school name and vehicle number.

### ARTICLE 5: RULE QUESTIONS, DISCUSSION, AND COMMUNICATION

#### 5.1 Question Submission

All rule questions must be submitted via the Rule Questions folder in the SAE Clean Snowmobile Challenge Public Discussion Forum on the SAE Website. Questions must include the appropriate rule number. Organizers will answer questions in the CSC Forum as soon as the Rules Committee agrees upon an answer. It is the responsibility of all participants to monitor this forum to keep up to date on competition questions. Answers will not be distributed individually to teams.

([http://forums.sae.org/access/dispatch.cgi/CLEAN\\_SNOWMOBILE](http://forums.sae.org/access/dispatch.cgi/CLEAN_SNOWMOBILE))

The organizers will only respond to questions submitted to the Forum and answers to questions will only be posted on the Forum for all to see.

#### 5.2 Loopholes and Problems

Any perceived loopholes in or potential problems with the rules should be provided to organizers via the Rules Questions folder in the SAE Clean Snowmobile Challenge Public Discussion Forum on the SAE Website. Suggestions for rule changes must reference the appropriate SAE CSC2013 rule number, state the current wording of the rule, and contain a suggestion of how the rule should be changed.

([http://forums.sae.org/access/dispatch.cgi/CLEAN\\_SNOWMOBILE](http://forums.sae.org/access/dispatch.cgi/CLEAN_SNOWMOBILE))

#### 5.3 Engineering Ethics

The SAE Clean Snowmobile Challenge is an engineering design competition that requires performance demonstration of snowmobiles. It is **NOT** a race. Engineering ethics will apply. In all events violation of the intent of the rule will be considered a violation of the rule.



#### **5.4 Participants' Discussion**

A Participants' Discussion folder has been provided in the SAE Clean Snowmobile Challenge Public Discussion Forum on the SAE Website. Participants are encouraged to use this folder to ask questions of and share information with other teams.

([http://forums.sae.org/access/dispatch.cgi/CLEAN\\_SNOWMOBILE](http://forums.sae.org/access/dispatch.cgi/CLEAN_SNOWMOBILE))

#### **5.5 Competition Information**

Miscellaneous information regarding competition logistics and administration will periodically be posted in the Competition Information folder in the SAE Clean Snowmobile Challenge Public Discussion Forum on the SAE Website and also on the Clean Snowmobile Challenge Website. It is the responsibility of all participants to monitor both the forum and website and have the most recent competition information.

([http://forums.sae.org/access/dispatch.cgi/CLEAN\\_SNOWMOBILE](http://forums.sae.org/access/dispatch.cgi/CLEAN_SNOWMOBILE))

(<http://www.sae.org/students/snow.htm>)

### **ARTICLE 6: CONDUCT OF THE EVENT**

#### **6.1 Snowmobile Operating Requirements**

##### **6.1.1 Technical Inspection**

A Technical inspection of each snowmobile will be performed after it arrives to the competition to determine if it complies with the requirements and restrictions of the rules. If any noncompliance is found, the team will be promptly notified. The team must correct all noncompliance before the snowmobile is permitted to compete in any event.

Technical inspections will not be performed on Tuesday, March 5, 2013. Any team that does not pass technical inspection on Monday, March 4, 2013, will not compete in the Range Event on March 5, 2013 and will forfeit their 100 point no-maintenance bonus (Rule 6.3 below). Check in and technical inspection times for each team will be posted on the CSC forum on February 25, 2013. Teams must show up at their scheduled time to register and be ready for tech inspection at that time. The penalty for not showing up on time will be 10 points per hour. After 4 hours (40 points) the team will not be eligible to compete in the Range Event on March 5, 2013.

It is the responsibility of participating teams to arrive at the competition prepared for the inspection. Teams will fill out and sign their own technical inspection forms indicating that they have checked all items prior to entering the Technical Inspection process.

Decisions of the Chief Technical Inspector concerning compliance or non-compliance with the CSC Rules are final and may not be appealed.

Both a static and a dynamic inspection will be performed on each sled. Sample forms used for the static and dynamic inspections are provided in the appendix.

Passing the Technical inspection does not, in any way; imply that SAE, the CSC organizers, or any individuals acting on their behalf certify that the snowmobile is safe for use. It is the sole responsibility of participating teams to ensure that their snowmobiles are safe for entry in the competition.



### 6.1.2 Disconnect Tether and Kill Switch

Each snowmobile must be equipped with a disconnect tether and a separate kill switch as described in Rules 4.7.1 and 4.7.2. Twenty-five (25) penalty points will be assessed each time the tether is not properly utilized when the High Voltage is engaged.

### 6.1.3 Moving Snowmobiles

When snowmobiles are driven anywhere but in practice areas, snowmobile trails, or roadways they must be driven at a walking pace. During the performance events when the excitement is high, it is particularly important that the snowmobile is driven at a very slow pace. The walking rule will be enforced and point penalties will be assessed for violations of this rule.

### 6.1.4 Support Snowmobiles

Team support snowmobiles may be allowed during certain events. The equipment listed in Rules 6.2 to 6.3 must be worn at all times any team member is on any snowmobile that is in motion. The same penalties described in Rule 6.2.4 will be applied to team support snowmobiles. Keweenaw Research Center Test Course guidelines (available upon request) apply to all support snowmobiles.


### 6.1.5 Track Stands

Snowmobiles may be placed on track stands before competing in events. However, this must take place with the snowmobile mounted in a snowmobile stand (you MAY NOT rev the snowmobile by manually holding the track off of the snow). Twenty-five (25) penalty points will be assessed each time this rule is violated.

The track stand must be designed to catch and retain track, track cleats, traction components and other items that might be thrown by the track. The stand must be no more than six (6) inches from the rear of the tunnel opening and no more than twelve (12) inches from the track. The track stand will be constructed of metal equivalent to 6061T6 aluminum, 1/8 inch thick. Side panels are mandatory and they must extend at least to the center of the rear axle. The sides and back must be secured inside the framework. Vertical coverage must be no more than one (1) inch off the ice and as high as the snowmobile support device. Coverage must be continuous (no lightening holes). A plywood liner is recommended to help absorb impact. The track stand must maintain sufficient height to prevent track coming into contact with ground/ice surface. The stand must be used whenever the rear of a machine is raised to clean out the track or motor.

Teams may not run their snowmobile motor in the KRC shop/pit area unless directed to do so by an organizer or judge.

A sample illustration of a snowmobile track stand is provided below (courtesy of the International Snowmobile Racing Association).

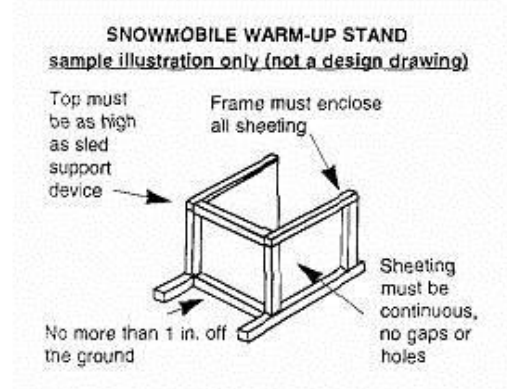



## 6.2 Driver Protective Equipment

### 6.2.1 Helmet Requirement


Full coverage helmets (Snell 2005 or newer) are mandatory. Note: Snell 2000 helmets expired January 1, 2012 and may not be used. Helmets not meeting Snell 2005 or newer may be impounded for the duration of the competition. The helmet must be securely fastened at all times. Eye protection is required.

### 6.2.2 Clothing and Boots

Gloves and clothing, along with boots (must be, at least, above the ankle) are mandatory. The driver's jacket and pants must have of an outer layer that is water and wind resistant, such as nylon, ballistic nylon, Gore-Tex laminates, etc. **Cotton pants, blue jeans, and other absorptive fabrics are prohibited.** The purpose of this rule is to protect the driver from the cold and moisture that he or she will be exposed to for potentially long times outside during events. Proper apparel must be worn by all drivers throughout the events.

### 6.2.3 Jacket/Vest

A jacket or vest that conforms to International Snowmobile Racing guidelines as well as shin and knee guards made of an impenetrable material must be worn by drivers during all competition events. A sample illustration of approved upper body protection is provided below (courtesy of the International Snowmobile Racing Association).

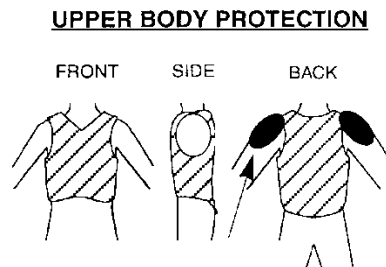

### 6.2.4 Penalties

Twenty-five (25) penalty points will be assessed for each individual not wearing appropriate driver's gear each time the individual is observed to be in violation of the rule by a competition official. Appropriate driver's gear must be worn any time a snowmobile is in motion.

## 6.3 On Site Modifications (Bonus Points and Penalties)

One hundred (100) bonus points will be awarded to teams who come prepared and do not need to repair or service their sled during the competition. If any parts of the snowmobile burn, fall off, or become missing after the Technical inspection through the completion of the final event, the team will not receive the 100 extra point bonus.

Hoods will be sealed with tape not zip ties. Twenty-five (25) penalty points will be assessed if the hood seal is broken by anyone other than a liaison or a competition official. Once the hood seal is broken, the liaison or competition official will log the reason for the opening and supervise the modification. New hood seals will be installed and the serial number of the new seals will be recorded.

Additional hood openings may be requested to inspect the motor area, however making changes will result in loss of the one hundred (100) point bonus. No changes or modifications to snowmobiles will be allowed after Technical inspection except for:

1. Those required to fix compliance issues, in which case the one hundred (100) point bonus is forfeited but no additional penalties will be assessed.
2. Those required to return the snowmobiles to operating condition after a breakdown, in which case the one hundred (100) point bonus is forfeited and additional penalties may apply.
3. Those considered standard maintenance items as described in Rule 6.4, in which case the one hundred (100) point bonus will be forfeited but no additional penalties will be assessed.

If any of the above modifications are to be made, the snowmobile must be serviced in the designated work area. The team may not return the snowmobile to its trailer to perform above maintenance items. Any team that violates this policy will be considered withdrawn from the competition.

In the event that a snowmobile design strategy is “changed” during repairs made after emission testing, the team may continue to compete in events. However, the team will not be eligible to receive any awards for events won after the strategy change.

#### 6.4 Permitted Maintenance Items

The following maintenance items will be allowed throughout the competition without penalty. Teams must notify and obtain permission from competition officials before any permitted maintenance is performed.

Changes in suspension to accommodate rider weight will be allowed without losing the 100 point bonus pertaining all requirements are met in Rule 4.5.4 and 4.6.2.

**NOTE: Even though these modifications can be made without penalty, making these modifications will result in automatic loss of the one hundred (100) point No-Maintenance bonus. This includes modifications made at the inspection times listed in section 6.3 above.**

- Addition of any fluid – same fluid must be used throughout competition (**NOTE:** adding significant amounts of coolant will not be considered standard maintenance)
- Track alignment and tension adjustment
- Drive belt/chain tension adjustment
- Headlight bulbs, taillight bulbs, brake light bulb replacement
- Tightening of loose bolts: suspension mounting, suspension front limiter strap, ski saddle, and spindle.
- Lubrication of snowmobile parts.
- Tightening of rear idler wheel bolts and idler adjusting bolt jam nuts.
- Changing of the track is **not** in the list of permitted maintenance items. In other words, the average snowmobiler would **not** consider changing of the track a standard maintenance procedure.
- Adding or removing traction studs after the initial technical inspection is **not** permitted.

You will also be penalized for:

- Changing the drive motor (200 pts)
- Replacing pack cells will not be allowed

**NOTE:** The intent of this rule is to allow 1000-mile maintenance items to be performed throughout the competition without penalty. Organizers reserve the right to modify and add to this list as conditions demand.

### **6.5 Drafting Prohibited**

Drafting of other snowmobiles will not be allowed during the Range event. Drafting is defined as following another vehicle closer than three (3) snowmobile lengths at cruising speeds for sustained periods of time. Infractions of this rule may be reported by other competitors or by competition officials. Twenty-five (25) points per occurrence will be deducted for drafting during the Range event.

### **6.6 Unsportsmanlike Conduct**

Unsportsmanlike conduct will not be tolerated. Any driver, crew member, faculty advisor, or spectator who, by their conduct, detracts from the character of the event, or who abuses, threatens, or uses profane language to an official may be assessed a warning or penalty for unsportsmanlike conduct. A second violation may result in expulsion of the team from the competition. Warnings and penalties may be given by any official and will become record with the approval/concurrence of the organizers.

### **6.7 Drug and Alcohol Policy**

Alcohol, illegal drugs, weapons or other illegal material are prohibited on the event site during the competition. This rule will be in effect during the entire competition. Any violation of this rule by a team member will cause the expulsion of the entire team. This applies to both team members and faculty advisors. Any use of drugs, or the use of alcohol by an underage individual, will be reported to the local authorities.

Drinking alcoholic beverages anywhere on the Keweenaw Research Center site including buildings, property, or test course is prohibited. There will be a zero-tolerance policy regarding the violation of this rule. Any participant, guest, or advisor violating this rule will cause the immediate disqualification of their team. Volunteers or event staff violating this rule will be dismissed.

There is also a zero-tolerance policy regarding the use of illegal drugs. Any participant, guest, or advisor observed using illegal drugs will cause the immediate disqualification of their team. Volunteers or event staff violating this rule will be dismissed.

### **6.8 Protests and Problems**

Any problems that arise during the competition will be resolved through the organizers and the decision will be final. All protests must be in writing. Protests must be filed within one (1) hour after scores are posted. The decision of the judges and organizers is final.

### **6.9 Event Appearance and Forfeits**

It is the responsibility of the teams to be in the right place at the right time. If a snowmobile is not ready to compete at the scheduled time, then the team forfeits the run of the event and will



not be offered a late make-up. The driver for an event will be disqualified if they do not attend the driver meeting for the event.

## ARTICLE 7: DEADLINES

### 7.1 Registration Opens on October 2, 2012

Student teams may begin to register online on October 2, 2012, at 10am EDT online CSC website <http://www.sae.org/students/snow.htm>.

At the time of registration, each team must provide battery chemistry, team program information, and a team photo to be printed in the event program. Teams will receive a confirmation upload once their information is received by the event organizers.

#### 7.1.1 Team Program Information per Rule 2.6

#### 7.1.2 Team Photo per Rule 2.6

### 7.2 Registration Closes on December 17, 2012

Registration closes at 11:59 p.m. on Monday, December 17, 2012, or when twenty-five (25) teams have registered; whichever comes first. Entries later than December 17, 2012 will be admitted at the discretion of the organizers.

### 7.3 Electric Systems Form (ESF) due January 13, 2013

The ESF is due January 13, 2013 by 5:00 p.m. your local university's time zone. Reference CSC ZE Rules Part B: Rule EV9.1 for description.

### 7.4 Design Paper and MSRP Due on February 23, 2013

The final Engineering Design paper, describing the modifications made to the snowmobile, and the final MSRP are due February 23, 2013.

#### 7.4.1 Engineering Design Paper

Teams must submit two (2) copies of their paper; one (1) copy in normal SAE paper print size and one (1) copy in large print (16 point). Both copies of the paper must be in Adobe Acrobat PDF format. The large print file is necessary for one of the judges who cannot read small print files. Failure to send a large print format file will be the same as not sending the file. The reports must be uploaded to <http://www.mtukrc.org/send.htm>.

The paper must be received no later than 5:00 p.m. **your local University time zone** on February 23, 2013.

**NOTE:** Late engineering design papers will accrue ten (10) penalty points for each day that they are late, up to a maximum penalty equal to the team's score for this event. This includes delivery of the large print format file. Teams are encouraged to send the files sooner than February 23, 2013 in case of Internet problems. Confirmation of receipt will be provided electronically on the upload site.

#### 7.4.1.1 File Format for Engineering Design Paper



The Engineering Design Paper must be submitted in Adobe Acrobat PDF format. No other file type will be accepted.

#### 7.4.1.2 Naming Convention for Engineering Design Paper

Teams must include their team number and the name of their University in the PDF file name. For example, “01\_uw-madison\_design\_paper.pdf” and “01\_uw-madison\_design\_paper\_large\_format.pdf” to avoid confusion for the organizers.

#### 7.4.2 Manufacturer’s Suggested Retail Price

One (1) electronic copy of the Manufacturer’s Suggested Retail Price Assessment (MSRP) is due. A copy of all supporting documentation should be brought to the competition. The MSRP judges will ask to see supporting documentation for the MSRP during the competition in a 20 minute presentation and explanation of the MSRP. The file should be received no later than 5:00 p.m. **your local University time zone** on February 23, 2013. The MSRP information must be uploaded to <http://www.mtukrc.org/send.htm>.

A penalty of ten (10) points per day will be assessed until the MSRP has been received up to a maximum penalty equal to the team’s score for this event. A confirmation e-mail will be returned.

**NOTE:** All teams will be required to update their MSRP at the start of the competition and have their snowmobile inspected to verify that their MSRP is complete and accurate. Teams not submitting a complete and accurate MSRP will be ineligible to receive the awards for Most Practical Solution and Best Value.

#### 7.4.2.1 File Format for Manufacturer’s Suggested Retail Price

The Manufacturer’s Suggested Retail Price document must be presented in Microsoft Office Excel 2007 format (.xlsx).

#### 7.4.2.2 Naming Convention for Manufacturer’s Suggested Retail Price

Teams must include their team number and the name of their University in the Microsoft Office Excel 2007 file name. For example, “01\_uw-madison\_msrp\_.xlsx” to avoid confusion for the organizers.

## ARTICLE 8: AWARDS

### 8.1 Award Criteria: Note: Awards are contingent upon sponsorship. Past awards include:

Best Zero Emissions:	Presented to team with the highest point value in the ZE category.
Best Design:	Presented to the team receiving the highest total score in the Engineering Design Paper, Oral Design Presentation, and Static Display events
Founder’s Trophy:	Trophy awarded to the team recognized by other participants as being the most sportsmanlike.
Cold Start Award:	Presented to teams passing the Cold Start Event



- Range Event: Presented to the team that travels the farthest distance on a single charge.
- Draw Bar Pull Award: Presented to the team that wins the Draw Bar Pull event.
- Innovation: Presented to the team who in the opinion of the organizers has the most innovative solution.
- Safety Award: Presented to the team who in the opinion of the organizer demonstrates the best safe practices.
- Most Improved Snowmobile: Presented to the team who in the opinion of the organizers has improved the most since last year.

**Note: Although not guaranteed, some awards will include a cash award dependant on sponsorship. These and other awards will be detailed in the event program available at the on-site competition registration booth.**

**8.2 Participation Plaque**

Each school will receive a plaque commemorating its participation in the competition.

**ARTICLE 9: SCORING**

**9.1 Overall Score**

Overall scores will be determined based on maximum points according to the following schedule:

<b>Zero Emissions Class Event</b>	<b>Minimum Points for Minimum Performance</b>	<b>Maximum Points for Relative Performance in Event</b>
Engineering Design Paper	5	100
Manufacturer's Suggested Retail Price (MSRP)	2.5	50
Oral Presentation	5	100
Weight	0	100
Range	5	100
Draw Bar Pull	5	100
Acceleration + Load Event	2.5	50
Objective Handling and Drivability	2.5	50
Subjective Handling	2.5	50
Cold Start	2.5	50



Zero Emissions Class Event	Minimum Points for Minimum Performance	Maximum Points for Relative Performance in Event
Static Display	0	50
Objective Noise	3.75	75
Subjective Noise		75
No-Maintenance Bonus		100
<b>Total</b>	36.25	1050

## 9.2 Event Points

The team having the best score in each of the events will be awarded the maximum possible points. Teams finishing behind those leaders will be awarded proportionally fewer points according to a linear scale. No negative points other than as a result of penalties will be awarded.

Points will be granted to teams that meet the minimum requirements of an event. The minimum requirements are outlined in each event that follows.

## 9.3 Penalties

Penalties will result from violating competition rules, performing prohibited maintenance on snowmobiles at any time after emissions testing, drafting during the Fuel economy/endurance event, or failing to meet competition deadlines.

## 9.4 Engineering Design Paper

### 9.4.1 Engineering Design Paper Description

This event requires the team to submit an engineering design paper describing the snowmobile conversion concept, design, and implementation. The paper should explain why modifications were performed and the results of testing and development. The paper must address the durability, practicality, and increased cost of any modifications. An absolute limit of **fifteen (15) pages** will be strictly enforced, except as noted below for papers submitted in alternative accessible formats.

Innovation is weighted more heavily in the scoring sheet than in past competitions. A maximum of 25 points can be awarded for innovation.

Late engineering design papers will receive ten (10) penalty points for each day that they are late, up to a maximum penalty equal to the team's score for this event. Hand written papers will not be accepted.

**Papers must conform to the current standard format for SAE technical papers.** The format for SAE technical papers is available on-line through the SAE website at:

[www.sae.org](http://www.sae.org)

#### 9.4.2 Engineering Design Paper Scoring

Engineering design paper judges will be a combination of professionals with a technical background in engineering, land management, and other fields related to the snowmobile industry. A sample engineering design paper judging form is located in the Rules Appendix for each category (IC and ZE). The weighting of points in each category is noted on the form.

The minimum requirement to receive points in this event will be to submit a paper according to the rules. The average of the judges' score will be the points awarded in this event. In the event that the judges' average score is less than 5 points, the team will receive 5 points.

IC papers and ZE papers will be judged and scored the same way.

Penalty points for late design papers will appear in the penalty section of the score sheet and not reduce the team's design paper score.

### 9.5 Manufacturer's Suggested Retail Price (MSRP)

9.5.1 The intent of the Manufacturer's Suggested Retail Price (MSRP) portion of the CSC is for the teams to determine and defend what they believe a reasonable MSRP would be for their sled. The teams are considered the actual manufacturer of the snowmobile they designed and the MSRP they place on the entry is to be for minimum manufacturing quantities of 5000 units/year. Sleds presented at competition are considered prototype units for demonstration of concepts. This exercise is about estimating the final value of the product to the consumer. This is a real exercise that you as graduates will be expected to perform upon entry into professional careers as engineers. The intended purpose of the MSRP is to make a reasonable estimate of what this sled would sell for in today's market. The MSRP in industry is not based on an exact formula, rather an estimate of what the unit can be sold for factoring in manufacturing cost, features offered, and perceived value in the market place. Consequentially any features added to a sled that would improve customer's perceived value must increase the MSRP. No entry with a value less than its equivalent base MSRP will be permitted as it is expected the teams are adding value and features to the snowmobile to improve emissions, fuel economy, and/or reduce emitted noise. Sled modifications for reasons other than emissions, fuel economy, and noise are permitted and must be included in the MSRP calculation. Teams will be given 20 minutes to present and defend their final MSRP submission to the judges.

9.5.2 Base sled for starting point of MSRP must be 2013 Model Year regardless of the model year of the sled.

9.5.3 MSRP must reflect all factory options included on competition sled (Electric Start, Reverse, etc.).

9.5.4 Electric powered sleds using IC engine chassis should attempt to obtain a reasonable cost of the chassis without engine. If unable to determine reasonable cost of the chassis, teams can reduce initial MSRP by 40% to reflect removal of original power pack (2013 base sled \* 60% will be used to calculate base MSRP for electric sleds only).

9.5.5 All MSRPs must include the following additions to meet competition goals:

- Sound treatment



- Studs
- Additional coolers, intercoolers
- Secondary air pumps, plumbing
- Battery pack added to sleds

9.5.6 All base sled modifications must be listed (may or may not add to base MSRP).

Examples include:

- Ski changes
- Suspension changes
- Track substitution
- Battery boxes
- Miscellaneous changes for lights, hand warmers, aesthetics, etc.
- Motor mounting brackets, hardware.

9.5.7 Value of each modification on MSRP must be estimated.

9.5.8.1 Modifications to prototype sled can be considered to add zero value if the items in question would obviously be included in production version.

9.5.8.2 Modifications to prototype sled to reduce weight, increase performance, or otherwise add features/value from base sled must be reflected in an MSRP that is higher than initial value.

9.5.9 All data used to estimate MSRP is to be included in spreadsheet form. This spreadsheet will be available in digital form on the CSC Forum webpage.

9.5.10 Estimated increase in MSRP must be based on one or more of the following:

- Manufacturing quotes plus 50%
- Wholesale plus 50%
- Retail price for added component, feature or difference between substituted components.
- A justified estimate of manufacturing cost differences between components plus 50% mark up for increased value to customer.

9.5.11 Judging will be conducted by a panel of industry representatives. If the values presented in the MSRP calculation are not supported with data, the Judges will meet once with the team(s) during the CSC and ask for clarifications or justification. Teams will have the opportunity to adjust the value of their MSRP up or down based on this meeting. One correction of the MSRP will be allowed based on the meeting with the Judges.

9.5.12.1 Teams that do not correct the MSRP to the Judges satisfaction will have the MSRP adjusted upward to what the Judging panel deems a reasonable cost.



9.5.12.2 Teams that are advised during the meeting with Judges that their MSRP is too high but do not adjust the value downward accordingly (or correctly) will have the MSRP value left as presented. The Judging panel will not adjust MSRPs downward, nor assess a penalty, as the higher proposed cost is believed to be a sufficient penalty.

#### Documentation Required

A spreadsheet tab for documentation will be added. Teams will be required to paste justification documents into the spreadsheet to support cost claims over \$25 dollars (.pdf or .jpeg format)

#### Part Changes

For part changes from the stock sled, the new price will be calculated by determining production part cost, replacement part cost and determining the more expensive unit. The more expensive price will have 50% premium added to it and this cost will be added to the MSRP. The reason for this change is to end the practice of significantly upgrading sleds with aftermarket parts that list for the same price or in some cases cost less and then request credit off the MSRP. This is in effect improving the customer value without additional cost to the product which is not a real world scenario. Reviewing manufactures websites the same sled/chassis/engine combination can vary by more than \$1,500.00 when higher performance sleds are ordered with premium suspension components and upgrades.

#### 9.5.13 MSRP Scoring

Scoring for the MSRP will be based on a combination of objective and subjective methods.

The objective part will consist of twenty (20) points to the team with the lowest MSRP after review and correction by the judges. The other team scores will be determined by a linear fit from the lowest to the highest MSRP. The highest MSRP will receive zero points.

In addition, subjective points will be awarded by the judges for the following items associated with determining the MSRP for their sled.

- 10 subjective points for the appropriateness of the choice of the base sled used as their MSRP starting point in the opinion of the judges.
- 10 subjective points for the quality of justifying the reason for their component adds in the opinion of the judges.
- 10 subjective points for the quality of their research in determining price in the opinion of the judges.

MSRP points will also be used to determine the winners of the Most Practical Solution and Best Value awards. Teams that do not submit a complete and accurate MSRP will be ineligible to receive the awards for Most Practical Solution and Best Value.

The minimum requirement for a score in this event is to submit a MSRP according to the rules. In the event that through the above evaluations the team's score is less than 2.5, the minimum score of 2.5 points will be awarded.



Penalties for late submission of the MSRP will appear in the penalty section of the score sheet and not reduce the team's MSRP score.

## 9.6 Oral Design Presentation

### 9.6.1 Oral Design Presentation Description

A ten (10) minute oral presentation of the rationale and approach to the conversion is required, followed by a five (5) minute question and answer period. The presentation should state clearly how your modified snowmobile addresses the needs of snowmobilers (performance), environmentalists/land managers/regulatory agencies (noise and emissions), and snowmobile dealers/outfitters (cost, durability, resale value). Your presentation should focus on how your snowmobile will economically and practically reduce the impact that snowmobiles have on the environment. The presentation will be judged on content, format, and delivery. All statements must be backed up with test results and science. This is a marketing delivery that must be based on FACTS.

Each team is required to submit an electronic copy of their oral design presentation to competition organizers at the end of the presentation. Electronic copies may be submitted on a CD or data stick. Teams that fail to provide an electronic copy of their oral presentation will receive zero (0) points for this event. **This requirement will be strictly enforced!**

### 9.6.2 Oral Design Presentation Scoring

Oral design presentation judges will include snowmobilers, environmentalists, land managers, and engineers. A sample oral design presentation judging form is located in the Rules Appendix. The average of the judges' scores for each team will equal the points awarded to that team on a 100 point scale weighted as described in the sample judging form.

Zero Emissions teams will be judged using a slightly different form appropriate for their competition objective. A sample ZE oral design presentation judging form is located in the Rules Appendix. The average of the judges' scores for each team will equal the points awarded to that team.

The minimum performance level for this event is presenting the oral design presentation. If the average of the judges' presentation score is less than 5 points, the team will receive the minimum performance level score of 5 points.

### 9.6.3 Zero Emissions Range Test

Zero Emissions snowmobiles will be subjected to a range test. The entries will be run at a speed of 20 mph (or a lower speed set by the organizers based on conditions) on a closed test course until the snowmobile is unable to proceed. There will be no limit on the distance each sled can travel. The team who travels the furthest will receive one hundred (100) points. All other ZE teams that complete the event will receive points based a linear scale where the team that travels the least miles receives 5 points.

The minimum performance level for this event is traveling 500 feet. 5 points will be awarded for traveling 500 feet.

### 9.6.4 Zero Emissions Draw Bar Pull Test

Zero Emissions snowmobiles will also be subjected to a Draw Bar Pull test. The snowmobile must pull a progressive resistance starting at 4 miles per hour until it can no longer proceed

through loss of power or traction. Once the test has started the driver may not bounce the sled in an effort to increase traction. The draw bar pull will be ranked based on an average of three pulls. The maximum average of the pulls will be the highest draw bar pull. Points will be awarded according to a linear scale from lowest draw bar pull (2.5 points) to the highest draw bar pull (50 points).

The minimum performance level for this event is pulling a load for which the team will receive 2.5 points.

## 9.7 Objective and Subjective Noise Events

### 9.7.1 Purpose of the Noise Event

The purpose of the objective noise event is to determine the peak A-weighted sound pressure level generated by each snowmobile during a steady state speed test. In addition, the subjective noise performance (sound quality) of each snowmobile at a bystander location will be evaluated. Zero Emissions snowmobiles will be tested along with IC engine snowmobiles although they have different requirements and design goals.

### 9.7.2 Noise Event Description for ZE Snowmobiles

Although a low noise signature for a zero-emissions snowmobile is important, it is not as important as in the IC Class where a high noise reading could result in lost sales. ZE sleds emit less noise and therefore the organizers have decided that the sound pressure created by the sleds will be graded on a relative scale for both the objective noise portion as well as the subjective noise portion of the test.

The snowmobile will be driven by a competition judge according to the published procedure SAE J1161. In addition, the snowmobile must have a functioning speedometer, be capable of operating at a steady-state speed of 15 mph for 150 feet, and be capable of traveling one (1) mile to reach the noise test course while maintaining adequate power to achieve all other requirements.

Every reasonable effort will be made to provide a test site that conforms to SAE J1161 specifications, however this cannot be guaranteed due to changing weather conditions.

A binaural recording system will be placed on one side of the vehicle acceleration lane, also at a distance of 50 feet, for the recording of subjective noise playback files. The side on which the recording system is placed will be chosen by the event staff immediately before the noise event.

The vehicle throttle will be applied smoothly by the operator when the vehicle reaches the start point of the lane. The amount of throttle opening used for the test will be determined by the operator to yield the appropriate speed

The vehicle throttle will be instantaneously and completely released when the vehicle reaches the end point of the lane. From this point, the vehicle will be allowed to coast back down to 10 mph. A portion of this coast-down may be included in the subjective noise recordings.

### 9.7.3 Subjective Noise Scoring

Data from the above Objective Noise Event will be recorded for playback to a “blind jury”. The jury will consist of attendees to the Clean Snowmobile Challenge. Jury members will be



screened to determine their ability to discern the noise playback files. Acceptable jury members will evaluate and grade the playback files. Jury members will not be given the team name of the sound file. Scoring will be based on a linear relationship from the worst to the best. The scale will be 75 points for ZE teams.

## 9.8 Objective Handling & Drivability Event


### 9.8.1 Purpose of Objective Handling & Drivability Event

The purpose of this event is to objectively evaluate the agility and maneuverability of each competition snowmobile.

### 9.8.2 Objective Handling & Drivability Event Description

A student driver from each team will be allowed to complete two (2) consecutive individually timed laps on a slalom style course (course example below). The fastest lap time will be recorded. No adjustments to the snowmobile will be allowed between laps. A one (1) second penalty will be assessed for each cone, barrel, or bale hit. Five (5) seconds will be assessed if the entire sled does not stop within the designated stopping area.

Zero Emissions sleds will be tested along with IC engine snowmobiles.

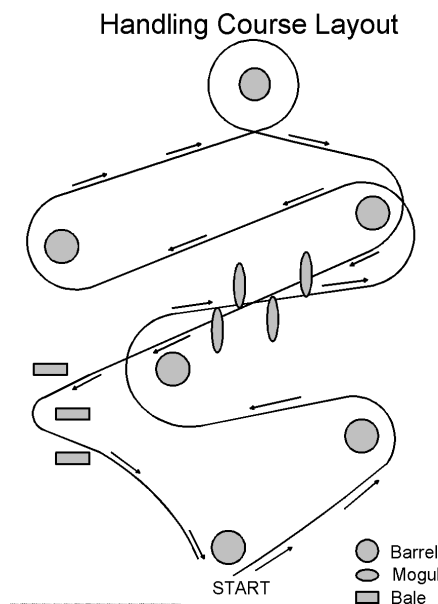

*Example course example layout - Not to scale.*

### 9.8.3 Objective Handling & Drivability Rules

The handling event will consist of a course designed to challenge the snowmobiles in the areas concerned with handling. The horsepower of the snowmobile will have very little influence on how well the snowmobile performs in this event. The snowmobiles will be driven by a student team member. This team member must wear the proper safety gear to be eligible for this event as specified earlier.

### 9.8.4 Objective Handling & Drivability Scoring



The scoring for the event will be based on a linear scale from the fastest time (75 points) to the slowest time which will receive 3.75 points.

The minimum performance level will be to complete one lap of the course.

## **9.9 Subjective Handling & Drivability Event**

### **9.9.1 Purpose of Subjective Handling & Drivability Event**

The purpose of this event is to subjectively evaluate the agility and maneuverability of the competition snowmobile.

### **9.9.2 Subjective Handling & Drivability Event Description**

Professional snowmobile riders will drive each competition snowmobile through a course designed to evaluate handling and drivability. Lap times will not be recorded. Rather, the professional rider will evaluate ride quality based on criteria on the Subjective Handling and Drivability Event Judging Form (see Appendix).

Zero Emissions sleds will be tested along with IC engine snowmobiles.

### **9.9.3 Subjective Handling & Drivability Rules**

The handling event will consist of a course designed to challenge the snowmobiles in the areas concerned with handling and overall drivability. The snowmobiles will be driven by a competition judge.

### **9.9.4 Subjective Handling & Drivability Scoring**

The scoring for the event will be based on the judge's ranking of each snowmobile according to the Subjective Handling and Drivability Event Judging Form (see Appendix).

Points will be awarded based on the average of the judges' scores.

The minimum performance level is allowing the judges to evaluate the subjective ride of the sled.

In the event that the judges' scores average below 2.5, the team will receive 2.5 points.

## **9.10 Acceleration Plus Load Event**

### **9.10.1 Purpose of the Acceleration Plus Load Event**

The purpose of this event is to determine the ability of the snowmobile to pull a heavy load quickly.

### **9.10.2 Acceleration Plus Load Event Description**

Each snowmobile will be driven by a student participant during this event. The snowmobile will be accelerated from a standing stop to the maximum speed that it can achieve in 500 feet. The snowmobile will be timed from start to finish, the lower the time the better. This event will be completed two times and the best time will be the time used for scoring. All drivers must wear the proper safety gear as specified earlier.

Zero Emissions snowmobiles will be tested for acceleration times pulling a load of approximately 500 pounds.



### 9.10.3 Acceleration Testing Event Scoring

The team with the least time to reach 500 feet pulling another snowmobile which will be riding on top of a plastic recue skid (best of two runs) will receive fifty (50) points.

Any team that passes the event by reaching 500 feet will receive the minimum performance level of 2.5 points.

The remaining sleds will receive additional points on a linear scale from the fastest measured time (50 points) to the slowest time.

## 9.11 Cold Start Event

### 9.11.1 Cold Start Event Description

Snowmobiles will be cold-soaked overnight. Teams will have exactly twenty (20) seconds to start their snowmobile indicated by the illumination of the vehicle ready light. To pass the event, the snowmobile must start in 20 seconds and then move forward without stalling 100 feet within 20 seconds. If the engine stalls during the 100 feet movement the team will fail.

### 9.11.2 Cold Start Event Scoring

If a snowmobile does not start within twenty (20) seconds and move 100 feet the team will fail the Cold Start event and will receive zero (0) points. Snowmobiles that start within twenty (20) seconds and move 100 feet in 20 seconds will receive fifty (50) points.

Zero Emissions sleds will be tested along with IC engine snowmobiles.

The minimum performance level of the Cold Start Event is starting within 20 seconds.

Teams that start within 20 seconds but fail to move 100 feet in 20 seconds will receive the minimum performance level of 2.5 points.

## 9.12 Static Display Event/Networking with Industry

### 9.12.1 Static Display Event Description

Each school must place their snowmobile on display. An area of approximately 8 feet by 10 feet will be provided for your snowmobile and display. The display is intended to serve as a marketing and promotional display that will encourage snowmobilers and outfitters to purchase and use your snowmobile. Teams are encouraged to put up signs, hand out flyers, and use any other marketing techniques to attract attention to your prototype snowmobile.

Zero Emissions sleds will be judged along with IC engine snowmobiles.

### 9.12.2 Static Display Scoring

This is a mandatory event worth fifty (50) points. Teams must show up on time and not tear down their display until allowed to do so by the competition organizer. This event will last approximately two (2) hours. Local dealers, snowmobile enthusiasts, and other professionals will tour the displays. Teams choosing not to attend the static display will receive zero (0) points.

## 9.13 Snowmobile Weight

Each snowmobile will be weighed during tech inspection. The lightest ZE weight sled will receive one hundred (100) points and the heaviest ZE weight sled will receive zero (0) points.



The score for the ZE teams will be based on a linear scale.

## **ARTICLE 10: ORGANIZER AUTHORITY**

The organizers of the competition reserve the exclusive right to revise the schedule of the competition and/or to interpret the competition rules at any time and in any manner which is, in their sole judgment, required for efficient operation or safety of the competition.

## **PART B: ELECTRICAL COMPONENT RULES**

### **ARTICLE EV1 ELECTRIC SYSTEM DEFINITIONS**

#### **EV1.1 High-Voltage (HV) and Low-Voltage (LV)**

- EV1.1.1 Whenever a circuit has a voltage greater than 30 VDC or 25 VAC RMS it is defined as High Voltage.
  - EV1.1.2 The maximum permitted operating voltage for Clean Snowmobile is 300 V. The maximum operating voltage is defined as the maximum measured battery voltage during the fully charged state.
  - EV1.1.3 Low voltage is defined as any voltage below 30 VDC or 25 VAC RMS.
  - EV1.1.4 Battery segments are sub-divisions of the battery and must respect either a maximum voltage or energy limit. Splitting the battery into its segments is intended to reduce the risks associated with working on the battery.
- #### **EV1.2 Grounded Low Voltage and Tractive System**
- EV1.2.1 The tractive system of the snowmobile is defined as every part that is electrically connected to the motor(s) and batteries.
  - EV1.2.2 The grounded low voltage (GLV) system of the snowmobile is defined as every electrical part that is not part of the tractive system.
  - EV1.2.3 The tractive system must be completely isolated from the chassis and any other conductive parts of the snowmobile.
  - EV1.2.4 The GLV system must be a low-voltage-system; see [EV1.1.2](#)
  - EV1.2.5 The GLV system must be grounded to the chassis.
  - EV1.2.6 The tractive and GLV system must be completely galvanically isolated.
  - EV1.2.7 The border between tractive and GLV systems is the galvanic isolation between both systems. Therefore, some components, such as the motor controller, may be part of both systems.

- EV1.2.8 The tractive system motor(s) must be connected to the battery through a motor controller. Bypassing the control system and connecting the tractive system battery directly to the motor(s) is prohibited.
- EV1.2.9 The GLV system must be powered up using a specified procedure before it is possible to activate the tractive system; see [EV4.9](#). Furthermore, a failure causing the GLV system to shut down must immediately deactivate the tractive system as well.

## ARTICLE EV2 ELECTRIC POWERTRAIN

### EV2.1 Motors

Only electrical motors are allowed. Any type of electrical motor is allowed. The number of motors is not limited.

**Note:** A motor is defined as an electromechanical device which converts electrical energy to mechanical energy.

### EV2.2 Power Limitation (N/A)

### EV2.3 Torque Control Sensor (Accelerator)

EV2.3.1 Drive by wire is permitted.

EV2.3.2 The torque control sensor must be actuated by a thumb actuated lever.

EV2.3.3 The thumb actuated lever must return to its original position when not actuated.

### EV2.4 Torque Control Sensor

EV2.4.1 All analog torque control signals must have continuous error checking which can detect open circuit, short to ground and short to sensor power and will shut down the torque production when a fault is detected.

EV2.4.2 Parallel digital (absolute) position encoders must incorporate error checking.

EV2.4.3 Serial digital (relative) encoding such as quadrature encoders are not permitted.

EV2.4.4 All digital communications directly controlling torque production must have a timeout such that if a valid command is not received, torque production is shut down.

EV2.4.5 All plausibility detections schemes must detect and shutdown torque production within 1 second from the errors first occurrence or loss of communication.

EV2.4.6 Teams must be prepared to demonstrate this feature at Electrical Tech Inspection. Unplugging a connector is an acceptable method of demonstration.

## ARTICLE EV3 TRACTIVE SYSTEM - ENERGY STORAGE

### EV3.1 Allowed Tractive System Batteries

EV3.1.1 The following batteries are acceptable: lithium-ion batteries, NiMH batteries, lead acid batteries and many other rechargeable battery chemistries.

The following batteries are not acceptable; molten salt batteries, thermal batteries, fuel cell, atomic and flywheel mechanical batteries.

EV3.1.2 Manufacturer's data sheets showing the rated specification of the battery cell(s) which are used must be provided in the ESF. Battery capacity may not exceed 8kWh at the C1 rate. Battery capacity is calculated using the nominal voltage. Teams must state, as accurately as possible, their battery capacity.

### EV3.2 Tractive System Battery Container – General Requirements

EV3.2.1 All batteries which store the tractive system energy must be built into battery segments and must be enclosed in a battery container(s).

EV3.2.2 If spare batteries are to be used then they all must be of the same size, weight and type as those that are replaced. Spare battery packs must be presented at Electrical Tech Inspection.

EV3.2.3 If the battery container(s) is not easily accessible during Electrical Tech Inspection, detailed pictures of the internals taken during assembly must be provided. If the pictures do not adequately depict the battery, it may be necessary to disassemble the battery to pass Electrical Tech Inspection.

### EV3.3 Tractive System Battery Container - Electrical Configuration

EV3.3.1 The poles of the tractive system battery stack(s) and/or cells must be insulated against the inside wall of the battery container by a UL recognized or equivalent insulating material rated for the maximum voltage of the tractive system, if the container is made of electrically conductive material. All conductive surfaces on the outside of the container must have a low-resistance connection to the GLV system ground. Special care must be taken to ensure that conductive penetrations, such as mounting hardware, are adequately protected against puncturing the insulating barrier.

EV3.3.2 Every tractive system battery container must contain at least one fuse and at least two battery isolation relays. See [EV3.5](#).

EV3.3.3 Maintenance plugs, additional contactors or similar measures must be taken to allow electrical separation of the internal battery segments such that the separated segments contain a maximum voltage of less than 120 VDC fully charged and a maximum energy as specified in [Table 1](#). The separation must affect both poles of the segment.



Chemistry	Segment Energy Limit
PbAcid	12MJ
NiMh	12MJ
Lilon (except LiFePO4)	5MJ
LiFePO4	12MJ

**Table 1 - BMS Segment Energy Limit**

- EV3.3.4 This separation method must be used whenever the tractive system battery containers are opened for maintenance and whenever battery segments are removed from the container. Maintenance plugs requiring tools to isolate the segments will not be accepted.
- EV3.3.5 If the HV-connectors of the battery containers can be removed without the use of tools, then a pilot contact/interlock line must be implemented which opens the shutdown circuit (see [EV5.1](#)) whenever the connector is removed.
- EV3.3.6 Contacting / interconnecting the single cells by soldering in the high current path is prohibited. Soldering wires to cells for the voltage monitoring input of the BMS is allowed since these wires are not part of the high current path.
- EV3.3.7 Each battery container must have a prominent indicator, such as an LED, that will illuminate whenever a voltage greater than 30 VDC is present at the snowmobiles side of the BIRs. Alternatively, an analog voltmeter may be used.
- EV3.3.8 The battery voltage indicator (see [EV3.3.7](#)) must be directly controlled by voltage being present at the connectors using hard-wired electronics. (No software control is permitted). Activating the indicator with the control signal which closes the AIRs is not sufficient.
- EV3.3.9 The battery voltage indicator must always work, e.g. even if the container is removed from the snowmobile and carried around.
- EV3.4 Tractive System Battery Container - Mechanical Configuration**
- EV3.4.1 All battery containers must be rugged and rigidly mounted to the chassis to prevent the containers from loosening during the dynamic events or possible accidents. If fasteners are used for mounting an battery container, they must comply with **T.11**
- EV3.4.2 The mounting system must be designed to withstand forces from a 20g deceleration in the horizontal plane and 10g deceleration in the vertical deceleration.
- EV3.4.3 The battery container must be built of mechanically robust material; See [EV3.4.2](#).
- EV3.4.4 The container material must be fire resistant according to UL94-V0, FAR25 or equivalent.
- EV3.4.5 The cells and/or segments must be appropriately secured against loosening inside the container and to withstand a 20g deceleration in the horizontal plane and 10g in the vertical plane. Calculations must be included in the ESF to justify your design.

- EV3.4.6 The battery segments contained within the battery must be separated by an UL recognized or equivalent electrically insulating barrier such that the limits of **EV3.3.3** are met. For all lithium based cell chemistries, except those based on LiFePO<sub>4</sub>, these barriers must also be fire resistant (according to UL94-V0, FAR25 or equivalent).
- EV3.4.7 Holes in the container are only allowed for the wiring-harness, ventilation, cooling or fasteners. These holes must be sealed according to **EV4.6**.
- EV3.4.8 The container must be completely closed at all times when mounted to the snowmobile and also when dismounted from the snowmobile without the need to install extra protective covers. Openings for ventilation should be of a reasonable size, e.g. completely open side pods containing batteries are not allowed.
- EV3.4.9 A sticker with an area of at least 750mm<sup>2</sup> and a red or black lightning bolt on yellow background or red lightning bolt on white background must be applied on every battery container. The sticker must also contain the text “High Voltage” or something similar if the battery voltage is greater than 30 VDC.
- EV3.4.10 Any battery that may vent an explosive gas must have a ventilation system or pressure relief valve to prevent the vented gas from reaching an explosive concentration.
- EV3.4.11 Every battery container which is completely sealed must have a pressure relief valve to prevent high-pressure in the container.
- EV3.4.12 There must be a battery firewall consisting of a layer of 1.5mm aluminum or equivalent with an insulating layer between the battery and driver. This can be included in the battery enclosure or separate. The insulating layer must be between the battery and battery firewall.

### **EV3.5 Battery Isolation Relay(s) (BIR)**

- EV3.5.1 At least two isolation relays must be installed in every tractive system battery container.
- EV3.5.2 The battery isolation relays must open both poles of the tractive system battery.
- EV3.5.3 If these relays are open, no HV may be present outside of the tractive system battery container.
- EV3.5.4 The isolation relays must be of a “normally open” type.
- EV3.5.5 The fuse protecting the battery HV circuit must have a rating lower than the maximum break current of the isolation relays.
- EV3.5.6 Battery isolation relays containing mercury are not permitted.

### **EV3.6 Battery Management System (BMS)**

- EV3.6.1 Each tractive system battery must be monitored by a battery management system whenever the tractive system is active or the battery is connected to a charger.

EV3.6.2 The BMS must continuously measure cell voltages in order to keep the cells inside the allowed minimum and maximum cell voltages stated in the cell data sheet. If single cells are directly connected in parallel, only one voltage measurement is needed. (See Table 2)

Chemistry	Maximum cells / voltage measurement
PbAcid	6
NiMh	6
Lithium based	1

**Table 2 - BMS Voltage Monitoring**

EV3.6.3 The BMS must continuously measure the temperatures of critical points of the battery to keep the cells below the allowed maximum cell temperature bound stated in the cell data sheet.

EV3.6.4 All voltage sense wires to the BMS must be either protected by fuses as defined in **ARTICLE EV6** or must be protected by resistors so that they cannot exceed their current carrying capacity in the event of a short circuit. Any fuse or resistor must be located as close as possible to the connection to the energy source. If any of these fuses are blown or if the connection to measure the cell voltage is interrupted in any other way then this must be detected by the BMS and must be reported as a critical voltage problem. If the BMS monitoring board is directly connected to the cell, it is acceptable to have a fuse integrated into the monitoring board.

EV3.6.5 Any GLV connection to the BMS must be galvanically isolated from the HV, including any connections to external devices such as laptops.

EV3.6.6 The BMS must monitor the temperature of the minimum number of cells in the battery as specified in Table 3 below. The monitored cells must be equally distributed over the battery container(s).

Chemistry	Cells monitored
PbAcid	5%
NiMh	10%
Lilon (except LiFePO4)	30%
LiFePO4	15%

**Table 3 – BMS Temperature Monitoring**

**NOTE:** It is acceptable to monitor multiple cells with one sensor if this sensor has direct contact to all monitored cells.

**NOTE:** It is strongly recommended to monitor the temperature of all cells.

EV3.6.7 The BMS must shut down the tractive system via opening the AIRs if critical voltage or temperature values are detected.

**EV3.7 Grounded Low Voltage System**

EV3.7.1 All GLV batteries, i.e. on-board power supplies, must be attached securely to the snowmobile.

EV3.7.2 N/A.

EV3.7.3 The hot (ungrounded) terminal must be insulated.

EV3.7.4 Battery packs based on Lithium Chemistry other than LiFePO4 must have over voltage, under voltage, short circuit and over temperature cell protection.

EV3.7.5 A team built Lithium LV battery pack may be used, but details on how the required protection is achieved must be included as part of the ESF submission.

## ARTICLE EV4 TRACTIVE SYSTEM – GENERAL REQUIREMENTS

### EV4.1 Separation of Traction System and Grounded Low Voltage System

EV4.1.1 The layout of electrical devices designed by the team must be documented accurately in the ESF.

EV4.1.2 There must be no connection between the chassis of the vehicle (or any other conductive surface that might be inadvertently touched by a crew member or spectator), and any part of any traction system circuits.

EV4.1.3 Traction system and GLV circuits must be physically segregated such that they are not run through the same conduit or connector, except for interlock circuit connections.

EV4.1.4 GLV circuits must not be present in the battery container except for required purposes, for example the BMS and BIR. This must be demonstrated in the ESF submission.

EV4.1.5 Where both tractive system circuits and GLV circuits are present within an enclosure, they must be separated by insulating barriers made of moisture resistant, UL recognized or equivalent insulating materials rated for 150 C or higher (e.g. Nomex based electrical insulation), or maintain the following spacing through air, or over a surface (similar to those defined in UL1741):

U < 100 VDC	1 cm (0.4 inch)
100 VDC < U < 200 VDC	2 cm (0.75 inch)
U > 200 VDC	3 cm (1.2 inch)

**Table 4 - Enclosure Conductor Spacing**

EV4.1.6 Spacing must be clearly defined. Components and cables capable of movement must be positively restrained to maintain spacing.

EV4.1.7 If tractive system circuits and GLV circuits are on the same circuit board they must be on separate, clearly defined areas of the board. Furthermore, the tractive system and GLV areas must be clearly marked on the PCB.  
Required spacing are as follows:

Voltage	Over Surface	Thru Air	Under
0-50 VDC	1.6 mm (1/16")	1.6 mm (1/16")	1 mm
50-150 VDC	6.4 mm (1/4")	3.2 mm (1/8")	2 mm
150-300 VDC	9.5 mm (3/8")	6.4 mm (1/4")	3 mm

**Table 5 - PCB Conductor Spacing**

- EV4.1.8 Teams must be prepared to demonstrate spacings on team-built equipment. Information on this must be included in the electrical system form (EV9.1). For inaccessible circuitry, spare boards or appropriate photographs must be available for inspection.
- EV4.2 Positioning of tractive system parts**
- EV4.2.1 All parts belonging to the tractive system including cables and wiring must be contained such that they are protected against being damaged in case of a crash or roll-over situation.
- EV4.2.2 Tractive system parts should not be mounted in a position where damage will occur from a side or rear impact.
- EV4.2.3 N/A
- EV4.2.4 In side or front view no part of the tractive system can project below the lower surface of the original tunnel. The goal here is to keep the tractive system above or within the tunnel to protect it from damage caused by hitting the ground.
- EV4.3 Tractive System Isolation**
- EV4.3.1 The driver controls must be grounded low voltage system.
- EV4.3.2 There must be a layer of an electrically insulating material between the tractive system and the driver. If the enclosure of the tractive system component is electrically insulating it can be used to meet this requirement.
- EV4.3.3 The insulation material must be fire resistant according to UL94-V0, FAR25 or equivalent.
- EV4.3.4 The insulation material must be puncture and scratch resistant.
- EV4.3.5 EV4.4 applies if a coated material is used, which is or may become conductive.
- EV4.3.6 No HV connections may be exposed. Non-conductive covers must prevent inadvertent human contact. This would include crew members working on or around the vehicle. Covers must be secure and adequately rigid. Body panels that must be removed to access other components are not a substitute for enclosing HV connections.
- EV4.3.7 HV systems and containers must be protected from moisture in the form of rain or puddles or snow intrusion.
- EV4.3.8 All handle bar controls, indicators, and data acquisition connections must be isolated using optical isolation, transformers, or the equivalent.

EV4.3.9 Electronic throttle or regenerative braking controls carrying high voltage must be mounted away from the handle bars and dash and actuated through non-conductive or well-grounded mechanical linkages.

#### **EV4.4 Grounding**

EV4.4.1 All electrically conductive parts of the snowmobile which might contact a damaged wire or any other electrical part must have a resistance below 300 mΩ (measured with a current of 1A) to GLV ground.

EV4.4.2 All parts of the snowmobile which may become electrically conductive (e.g. coated metal parts, carbon fiber parts, etc.) which might contact a damaged wire or electrical part, no matter if tractive system or GLV, must have a resistance below 5 ohm to control system ground.

EV4.4.3 Electrical conductivity of any part may be tested by checking any point which is likely to be conductive. Where no convenient conductive point is available then an area of coating may be removed.

**NOTE:** Carbon fiber parts may need special measures such as using copper mesh or similar modifications to keep the ground resistance below 5 ohms.

#### **EV4.5 Tractive System Measuring points (TSMP)**

EV4.5.1 Two tractive system voltage measuring points must be installed directly next to the master switches; see [EV5.2](#).

EV4.5.2 The TSMPs must be protected by a non-conductive housing that can be opened without tools.

EV4.5.3 The TSMP must be protected from being touched with the bare hand / fingers, even when the housing is opened.

EV4.5.4 4mm shrouded banana jacks rated to an appropriate voltage level must be used for the TSMPs. See [Figure 1](#) for an example.

EV4.5.5 The TSMPs must be connected to the positive and negative motor controller/inverter supply lines.

EV4.5.6 Each TSMP must be secured with an appropriately rated current limiting device (fuse, resistor, etc.).

EV4.5.7 The TSMPs will be used to check during Electrical Tech Inspection that the tractive system is shut down properly in the given time; see [EV5.1.3](#). They are also needed to ensure the isolation of the tractive system of the vehicle for possible rescue operations after an accident or when work on the snowmobile is to be done.

EV4.5.8 Next to the TSMP a GLV system ground measuring point must be installed. This measuring point must be connected to the GLV system ground.



EV4.5.9 A shrouded 4mm banana jack must be used for the GLV ground measuring point; see **Figure 1** for an example.



**Figure 1 - Shrouded 4mm Banana Jack**

**EV4.6 HV Insulation, wiring and conduit**

EV4.6.1 All parts, especially live wires, contacts, etc. of the tractive system, need to be isolated by non-conductive material or covers to be protected from being touched. In order to achieve this, it must not be possible to touch any tractive system connections with a 10 cm long, 0.6 cm diameter insulated test probe when the tractive system enclosures are in place.

EV4.6.2 Non-conductive covers must prevent inadvertent human contact with any tractive system circuit. This must include crew members working on or around the vehicle. Covers must be secure and adequately rigid. Body panels that must be removed to access other components, etc. are not a substitute for enclosing tractive system connections.

EV4.6.3 Tractive systems and containers must be protected from moisture in the form of rain or puddles or snow intrusion.

**Note:** A rating of IP65 is recommended for the rain test.

EV4.6.4 N/A

EV4.6.5 Only insulation material that is appropriate for the expected surrounding temperatures may be used and this must have a minimum temperature rating of 90°C. Using only insulating tape or rubber-like paint for insulation is prohibited.

EV4.6.6 All wires and terminals and other conductors used in the tractive system must be sized appropriately for the continuous rating of the fuse which protects them and the wires must be marked with wire gauge, temperature rating and insulation voltage rating. Alternatively a serial number or a norm printed on the wire is sufficient if this serial number or norm is clearly bound to the wire characteristics for example by a data sheet. The minimum acceptable temperature rating for HV cables is 90°C.

**Note:** Many high current fuses can allow significant overcurrent conditions which may be adequate to cover the peak power requirements and allow sizing of fusing and wiring according to continuous or RMS needs.

EV4.6.7 All tractive system wiring must be done to professional standards with appropriately sized conductors and terminals and with adequate strain relief and protection from loosening due to vibration etc. Conductors and terminals cannot be modified from their original size/shape and must be appropriate for the connection being made.

EV4.6.8 All tractive system wiring that runs outside of electrical enclosures must be enclosed in separate orange non-conductive conduit. The conduit must be securely anchored at least at each end so that it can withstand a force of 200N without straining the cable, and must be located out of the way of possible snagging or damage.

EV4.6.9 All tractive system connections must be designed so that they use intentional current paths through conductors such as copper or aluminum and should not rely on steel bolts to be the primary conductor. The connections must not include compressible material such as plastic in the stack-up.

EV4.6.10 Tractive system wiring must be shielded against damage by rotating and/or moving parts.

EV4.6.11 If external, un-insulated heat sinks are used, they must be properly grounded to the GLV system ground; see [EV4.4](#).

#### **EV4.7 Tractive System Enclosures**

EV4.7.1 Every housing or enclosure containing parts of the tractive system except motor housings must be labeled with (a) reasonably sized sticker(s) with a red or black lightning bolt on yellow background or red lightning bolt on white background. The sticker must also contain the text "High Voltage" or something similar if the voltage is more than 30 VDC or 25 VAC.

EV4.7.2 If the housing material is electrically conductive or possibly electrically conductive, it must have a low-resistance connection to GLV system ground; see [EV4.4](#).

#### **EV4.8 HV Disconnect (HVD)**

EV4.8.1 It must be possible to disconnect at least one pole of the tractive system battery by quickly removing an accessible element, fuse or connector, in case of (a) stuck battery isolation relay(s), for example.

EV4.8.2 It must be possible to remove the HVD within 10 seconds from the fully assembled condition. The team must demonstrate this during Electrical Tech Inspection. Being able to quickly disconnect the battery(s) from the rest of the tractive system by its connector(s) will satisfy this rule.

EV4.8.3 [EV4.6](#) remains valid, therefore a dummy connector or similar may be needed to restore the system's isolation.

EV4.8.4 The HV Disconnect must be clearly marked with "HVD".


EV4.8.5 If a tool is needed to open the HVD this tool must be attached to the under the hood. If no tools are needed to open the HVD, an interlock must open up the shutdown circuit when the HVD is removed. Hood will taped shut not zip tied to allow for easier emergency access.

#### **EV4.9 Activating the Tractive System**

Snowmobiles in this competition will be operated by judges familiar with the operation of snowmobiles. For this reason, the Zero Emissions snowmobile must be turned on and off like a conventional electric start internal combustions snowmobile.

The ZE snowmobile must have a key operation with OFF, ON, and CRANK positions. In the OFF position the snowmobile will be de-energized (BIR open) and not move when the thumb actuated lever is moved. In the ON position, the snowmobile's GLV systems may be enabled, however the tractive system must remain de-energized until the key is cranked. In the momentary CRANK position, tractive system is enabled. An example of a possible state machine representation of this is shown below.

The shutdown circuit described in EV5.1 will negate all key functions regardless of position and turn all electrical systems off.

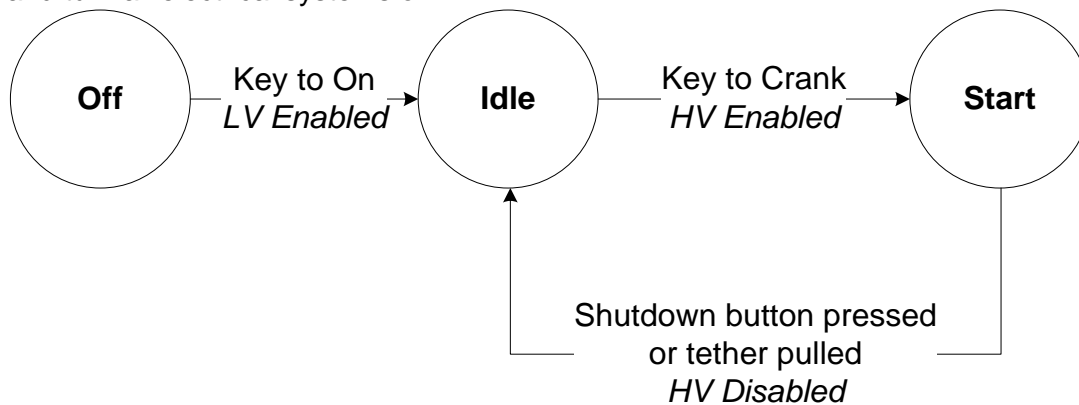

#### EV4.10 Pre-Charge and Discharge Circuits

EV4.10.1 A circuit that is able to pre-charge the intermediate circuit to at least 90% of the current tractive system battery voltage before closing the second BIR must be implemented. This circuit must be disabled by a de-activated shutdown circuit; see [EV5.1](#). Therefore, the pre-charge circuit must not be able to pre-charge the system if the shutdown circuit is open.

EV4.10.2 It is allowed to pre-charge the intermediate circuit for a conservatively calculated time before closing the second BIR. A feedback via measuring the current intermediate circuit voltage is not required.

EV4.10.3 If a discharge circuit is needed to meet the requirements of [EV5.1.3](#), it must be designed to handle the maximum discharge current for at least 15 seconds. The calculation proving this must be part of the ESF.

EV4.10.4 The discharge circuit must be wired in a way that it is always active whenever the shutdown circuit is open. Furthermore, the discharge circuit must be fail-safe.

#### EV4.11 Vehicle Ready Light

EV4.11.1 The vehicle ready light must be clearly visible when the tractive system is active. The snowmobile is defined as active whenever the voltage outside the battery containers exceeds 30 VDC or 25 VAC RMS. For this the snowmobile must be equipped with a light mounted on the dashboard which lights if the snowmobile's tractive system is active and which is off when the tractive system is not active.

EV4.11.2 The vehicle ready light must be green.

- EV4.11.3 The vehicle ready light must be labeled Vehicle Ready.
- EV4.11.4 The vehicle ready light must not be powered by high voltage.
- EV4.11.5 The vehicle ready light must be directly controlled by voltage being present at the output of the battery and powered by the GLV system (no software control is permitted). Activating the indicator with the control signal which closes the BIRs is not sufficient.
- EV4.11.6 The vehicle ready light must be clearly visible even in very bright sunlight.

#### **EV4.12 Ready-To-Drive-Sound**

- EV4.12.1 The snowmobile must make a characteristic sound, once not continuous, for at least 1 second and a maximum of 3 seconds, when it is ready to drive.
- EV4.12.2 The snowmobile is ready to drive as soon as the motor(s) will respond to the input of the torque control sensor/thumb actuated lever.
- EV4.12.3 The sound level must be a minimum of 70dBA, fast weighing, in a radius of 2m around the snowmobile.
- EV4.12.4 The sound used must be easily recognizable. No animal voices, song parts or sounds that can be interpreted as offensive will be accepted. For example, Sonalert makes many devices which could be used to meet this requirement.

### **ARTICLE EV5 SHUTDOWN CIRCUIT AND SYSTEMS**

#### **EV5.1 Shutdown Circuit**

- EV5.1.1 The shutdown circuit must directly carry the current driving the battery isolation relays (BIRs).
- EV5.1.2 The shutdown switch is defined as the shutdown switch and the tether in Part A: Rule 4.7.2 and 4.7.1.
- EV5.1.3 If the shutdown circuit is opened/interrupted the tractive system must be shut down by opening all battery isolation relay(s) and the voltage in the tractive system must drop to under 30 VDC or 25 VAC RMS in less than five seconds after opening the shutdown circuit.
- EV5.1.4 An example schematic of the required shutdown circuit, excluding possibly needed interlock circuitry, is shown below. See [Figure 3](#).
- EV5.1.5 If the shutdown circuit is opened by the BMS or the IMD the tractive system must remain disabled until being manually reset by a person other than the driver.
- EV5.1.6 It must not be possible for the driver to re-activate the tractive system from while sitting on the snowmobile in case of a BMS or IMD fault.

For example: Applying an IMD test resistor between tractive system positive and GLV system ground must deactivate the system. Disconnecting the test resistor must not re-activate the system. The tractive system must remain inactive until it is manually reset.

- EV5.1.7 All circuits that are part of the shutdown circuit must be designed in a way, that in the de-energized state they will interrupt the current controlling the BIRs.
- EV5.1.8 If the tractive system is de-activated while driving, the motor(s) must spin free, e.g. no brake torque must be applied to the motor(s).
- EV5.1.9 N/A
- EV5.1.10 N/A


**EV5.2 Master Switches**

EV5.2.1 Each vehicle must have a Tractive System Master Switch (TSMS):  
a. Tractive System Master Switch (TSMS).

EV5.2.2 The TSMS must be located at the rear of the snowmobile.



**Figure 2 - Typical Master Switch**

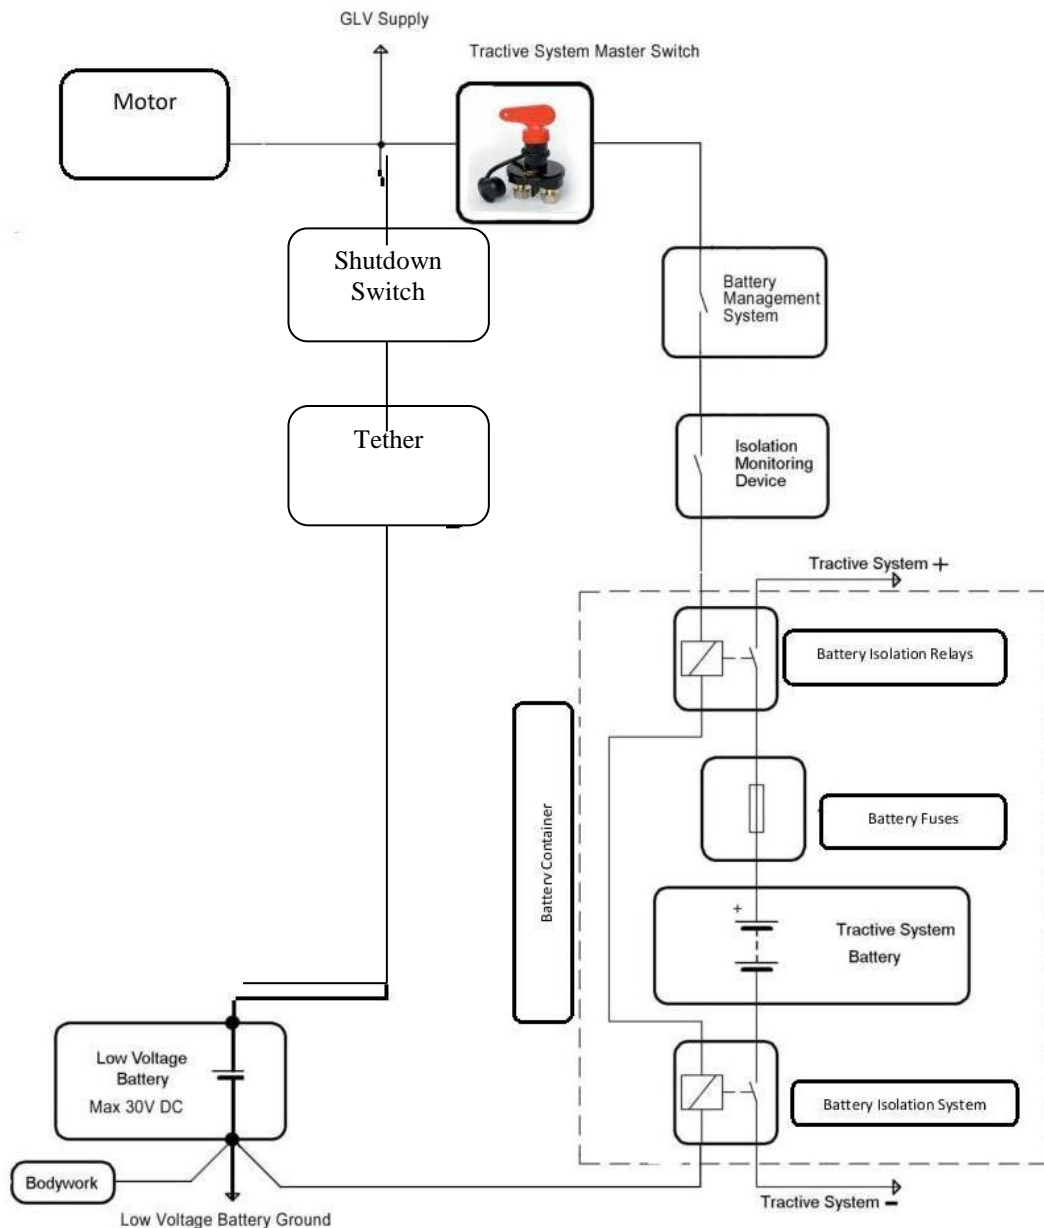

**Figure 3 – Example Master Switch and Circuit Configuration**

- EV5.2.3 The TSMS must be direct acting, i.e. it cannot act through a relay or logic.
- EV5.2.4 The master switch must be of the rotary type, with a red, removable key, similar to the one shown in the explanatory shutdown circuit and in Figure 2.
- EV5.2.5 The TSMS is not allowed to be easily removable, e.g. mounted onto removable body work.
- EV5.2.6 A sticker with a red or black lightning bolt on a yellow background or red lightning bolt on a white background must additionally mark the TSMS.



### **EV5.3 Insulation Monitoring Device (IMD)**

- EV5.3.1 Every snowmobile must have an insulation monitoring device (IMD) installed in the tractive system.
- EV5.3.2 The IMD must be a Bender A-ISOMETER ® iso-F1 IR155-3203 or -3204 or equivalent IMD approved for automotive use. Equivalency may be approved by the rules committee based on the following criteria: robustness to vibration, operating temperature range, availability of a direct output, a self-test facility and must not be powered by the system which is monitored.
- EV5.3.3 The response value of the IMD needs to be set to 500 ohm / volt, related to the maximum tractive system operation voltage.
- EV5.3.4 In case of an insulation failure or an IMD failure, the IMD must open the AIRs. This must be done without the influence of any logic e.g. a micro-controller. See also [EV5.1.5](#) and [EV5.1.6](#) regarding the re-activation of the tractive-system after an insulation fault.
- EV5.3.5 The status of the IMD must be shown to the driver by a red indicator light on the dash that is easily visible even in bright sunlight. This indicator must light up if the IMD detects an insulation failure or if the IMD detects a failure in its own operation e.g. when it loses reference ground.
- EV5.3.6 The IMD indicator light must be clearly marked with the lettering “IMD” or “GFD” (Ground Fault Detector).

## **ARTICLE EV6 FUSING**

### **EV6.1 Fusing**


- EV6.1.1 All electrical systems (both tractive system and grounded low voltage system) must be appropriately fused.
- EV6.1.2 The continuous current rating of a fuse must not be greater than the continuous current rating of any electrical component, for example wire, bus bar, battery cell or other conductor that it protects.
- EV6.1.3 All fuses and fuse holders must be rated for the highest voltage in the systems they protect. Fuses used for DC must be rated for DC, and must carry a DC rating equal to or greater than the system voltage of the system in which they are used.
- EV6.1.4 All fuses must have an interrupt current rating which is higher than the theoretical short circuit current of the system that it protects.
- EV6.1.5 If more than one battery cell is used to form a set of single cells in parallel such that groups of parallel cells are then combined in series, then either each cell must be appropriately fused or the cell manufacturer must certify that it is acceptable to use this number of single cells in parallel. Any certification must be included in the ESF.

- EV6.1.6 If multiple parallel strings of batteries are used then each string must be individually fused. If individual fuses are used this must provide a total fusing equal to the number of fuses multiplied by the fuses rating. Any conductors, for example wires, busbars, cells etc. conducting the entire pack current must be appropriately sized to this total fusing or an additional fuse must be used to protect the conductors.
- EV6.1.7 Battery packs with low or non-voltage rated fusible links for cell connections may be used provided that:
- A fuse rated at a current three times lower than the sum of the parallel fusible links and complying with **EV6.1** is connected in series.
  - The battery monitoring system can detect an open fusible link, and will shut down the electrical system by opening HV contactors if a fault is detected.
  - Fusible link current rating is specified in manufacturer's data or suitable test data is provided.
- EV6.1.8 Cells with internal over-current protection may be used without external fusing or fusible-links if suitably rated.
- NOTE:** Most cell internal over-current protection devices are low or non-voltage rated and conditions of **EV6.1.7** will apply.
- EV6.1.9 The ESF must include all details of fuse and fusible link and internal over current protection including documentation from manufacturer for the particular series and parallel configuration, and string voltage.

## ARTICLE EV7 ELECTRICAL SYSTEM TESTS

### EV7.1 Insulation Monitoring Device Test (IMDT)

- EV7.1.1 The insulation monitoring device will be tested during Tech Inspection. This is done by connecting a resistor between the TSMP (see **EV4.5**) and several electrically conductive vehicle parts while the tractive system is active, as shown in the example below.
- EV7.1.2 The test is passed if the IMD shuts down the tractive system within 30 seconds at a fault resistance of 250 ohm / volt (50% below the response value).
- EV7.1.3 The IMDT may be repeated at any time during the event. After the snowmobile passes the test for the first time, critical parts of the tractive system will be sealed. The vehicle is not allowed to take part in any dynamic event if any of the seals are broken until the IMDT is successfully passed again.

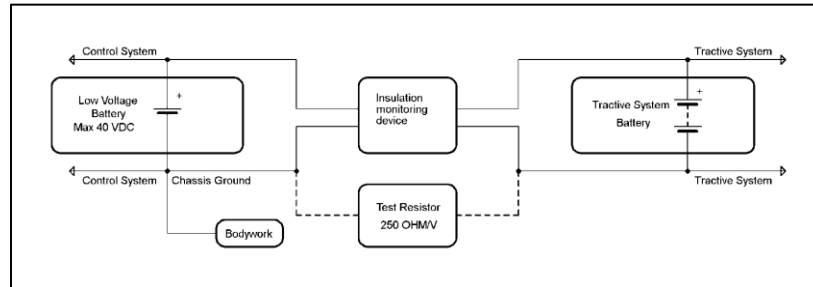

**Figure 4 – Insulation Monitoring Device Test**

**EV7.2 Insulation Measurement Test (IMT)**

EV7.2.1 The insulation resistance between the tractive system and control system ground will be measured during Electrical Tech Inspection. The available measurement voltages are 250 V and 500 V. All snowmobiles with a maximum nominal operation voltage below 500 V will be measured with the next available voltage level. For example, a 175 V system will be measured with 250 V; a 300 V system will be measured with 500 V etc.

EV7.2.2 To pass the IMT the measured insulation resistance must be at least 500 ohm/volt related to the maximum nominal tractive system operation voltage.

**EV7.3 Rain Test**

All snowmobiles must pass the Rain Certification Test.

To become Rain Certified, a vehicle must pass a visual inspection that checks that all high and low voltage wiring and components are suitably protected from rain and water thrown up by skis and track. An additional test may require that the vehicle survive a 60 second water spray with all systems energized without tripping the Ground Fault Detector.

The water spray will be directed from the top, front and sides of the vehicle. The spray is intended to simulate rain and will typically have drops ranging in size between 0.1 to 5 mm in diameter. A strong stream of water will not be directed at the vehicle.

If a ground fault or other water-related electrical failure occurs during an event, the vehicle will not be permitted to continue the event then underway.

**EV7.4 Ready-To-Drive-Sound Test**

EV7.4.1 The sound level will be measured during a static test. Measurements will be made with a free-field microphone placed free from obstructions 1.5m above the ground and 2m from the closest component of the vehicle directed at the vehicle.

EV7.4.2 This test may be repeated from any location around the vehicle satisfying the conditions of [EV7.4.1](#), and must meet the conditions specified in [EV4.12.3](#).

## ARTICLE EV8 HIGH VOLTAGE PROCEDURES & TOOLS

### EV8.1 Working on Tractive System Battery Containers

- EV8.1.1 If the organizers have provided a “Designated Charging Area”, then opening of or working on battery containers is only allowed in that charging area, see [EV8.2](#), and during Electrical Tech Inspection.
- EV8.1.2 Whenever the battery containers are opened the battery segments must be separated by using the maintenance plugs; see [EV3.3.3](#).
- EV8.1.3 Whenever the battery or tractive system is being worked on, only appropriate insulated tools may be used.

### EV8.2 Charging

- EV8.2.1 If the organizers have provided a “Designated Charging Area”, then charging tractive system batteries is only allowed inside this area.
- EV8.2.2 Batteries may be charged inside the snowmobile.
- EV8.2.3 It is also possible to charge the batteries outside the snowmobile with a removable battery container.
- EV8.2.4 The battery containers or the snowmobile itself, depending on whether the batteries are charged externally or internally, must have a label with the following data during charging: Team name and Safety Responsible phone number(s).
- EV8.2.5 Only chargers presented and sealed at Tech Inspection are allowed. All connections of the charger(s) must be isolated and covered. No open connections are allowed.
- EV8.2.6 No work is allowed on any of the snowmobile’s systems during charging if the batteries are charging inside of or connected to the snowmobile.
- EV8.2.7 No grinding, drilling, etc. is allowed in the charging area.
- EV8.2.8 At least one team member who has knowledge of the charging process must stay with the battery(s) / snowmobile during charging.
- EV8.2.9 Moving battery cells and/or stack(s) around at the event site is only allowed inside a completely closed battery container.
- EV8.2.10 High Voltage wiring in an off board charger does not require conduit; however it must be a UL listed flexible cable that complies with NEC Article 400; double insulated.
- EV8.2.11 All chargers must be UL (Underwriters Laboratories) listed. Any waivers of this requirement require approval in advance, based on documentation of the safe design and construction of the system, including galvanic isolation between the input and output of the charger. Waivers for chargers must be submitted at least 30 days prior to the start of the competition.

### **EV8.3 Battery Container Hand Cart**

- EV8.3.1 In case removable tractive system battery containers are used in order to accommodate charging, a hand cart to transport the batteries must be presented at Tech Inspection.
- EV8.3.2 The hand cart must have a brake such that it can only be released using a dead man's switch, i.e. the brake is always on except when someone releases it by pushing a handle for example.
- EV8.3.3 The brake must be capable to stop the fully loaded battery container hand cart.
- EV8.3.4 The hand cart must be able to carry the load of the battery container(s).
- EV8.3.5 The hand cart(s) must be used whenever the battery container(s) are transported on the event site.
- EV8.3.6 Each team must present the following basic set of tools in good condition during technical inspection:
  - a. Insulated cable shear
  - b. Insulated screw drivers
  - c. Multimeter with protected probe tips
  - d. Insulated wrenches, if screwed or bolted connections are used in the tractive system
  - e. Face shield which meets ANSI Z87.1-2003
  - f. HV insulating gloves which are within test date and protective outer glove
  - g. 2 HV insulating blankets of at least 1 m<sup>2</sup> or 9 ft<sup>2</sup> each
  - h. Safety glasses with side shields for all team members which meet ANSI Z87.1-2003

**Note:** All electrical safety items must be rated for at least the maximum tractive system voltage.

## **ARTICLE EV9 ELECTRICAL SYSTEM FORM AND FMEA**

### **EV9.1 Electrical System Form (ESF)**

- EV9.1.1 Prior to the event all teams must submit clearly structured documentation of their entire electrical system (including control and tractive system) called the Electrical System Form (ESF).
- EV9.1.2 The ESF must visualize the interconnection of all electric components including the voltage level, the topology, the wiring in the snowmobile and the construction and build of the battery(s).
- EV9.1.3 Teams must present data sheets with rated specifications for all tractive system parts used and show that none of these ratings are exceeded (including wiring components). This includes stress caused by the environment e.g. high temperatures, vibration, etc.
- EV9.1.4 A template including the required structure for the ESF will be made available online.
- EV9.1.5 The ESF must be submitted as an Adobe PDF file.



EV9.1.6 The minimum allowed font size is 11pts. The font used must be Arial. Small pictures and small schematics should be put inside the text for easy reference, not in the appendix.

EV9.1.7 Data sheets and large schematics should be put in the appendix.

**NOTE:** Passing the ESF does not mean that you automatically pass Electrical Tech Inspection with the described items / parts.

## **EV9.2 Failure Modes and Effects Analysis (FMEA)**

EV9.2.1 Teams must submit a complete failure modes and effects analysis (FMEA) of the tractive system prior to the event.

EV9.2.2 A template including required failures to be described will be made available online.

**Note:** Do not change the format of the template. Pictures, schematics and data sheets to be referenced in the FMEA must be included in the ESF.

## **ARTICLE T11**

### **T11.1 Fastener Grade Requirements**

T11.1.1 All threaded fasteners utilized in the steering, braking, and suspension systems must meet or exceed, SAE Grade 5, Metric Grade 8.8 and/or AN/MS specifications.

## **ACRONYMS**

**AC** - Alternating Current  
**BIR** - Battery Isolation Relay  
**BMS** - Battery Management System  
**ANSI** - American National Standards Institute  
**DC** - Direct Current  
**ESF** - Electrical System Form  
**EV** - Electrical Vehicle  
**FMEA** - Failure Modes and Effects Analysis  
**GLV** - Grounded Low Voltage  
**HV** - High Voltage  
**HVD** - High Voltage Disconnect  
**IMD** - Insulation Monitoring Device  
**IMDT** - Insulation Monitoring Device Test  
**IMT** - Insulation Measurement Test  
**LV** - Low Voltage  
**NiMH** - Nickel Metal Hydride  
**PCB** - Printed Circuit Board  
**RMS** - Root Mean Squared  
**TSMP** - Tractive System Measuring Point  
**TSMS** - Tractive System Master Switch  
**UL** - Underwriters Laboratory





**APPENDIX A**  
**Snowmobile Description Form**

Please fill out the following form and return it to the registration desk. Answer all questions about your snowmobile as it is actually competing (not as it was intended to compete).

Team Name \_\_\_\_\_ Team Number: \_\_\_\_\_

*Will be available on the Forum before competition.*



**APPENDIX B**  
**SAE CSC 2013 Engineering Design Paper Judging Form Zero Emissions Sleds Only**

University Team Name: \_\_\_\_\_

Score the following categories, giving each points ranging from 0 (very bad) to the maximum points available for the category (excellent). The maximum points available for each category are listed in parenthesis.

When evaluating the papers, please keep in mind that the papers should be high-quality, technical papers that meet the rigorous standards required for publication in scholarly journals.

\_\_\_\_\_ **CONTENT – OVERALL PERFORMANCE (10):** Does the paper describe the challenges of the zero-emissions snowmobile? Does the paper describe the strategy the team selected to achieve the required performance? Are adequate technical details given? Are adequate results given?

\_\_\_\_\_ **CONTENT – RANGE (20):** Does the paper describe the challenges meeting the 10+ mile range requirement? Does the paper describe the strategy team selected to achieve this? Are adequate technical details given? Are adequate results given?

\_\_\_\_\_ **CONTENT – DRAW BAR PULL (15):** Does the paper describe the challenges of maximizing draw bar pull capabilities of their design? Does the paper describe the strategy team selected to achieve this? Are adequate technical details given? Are adequate results given?

\_\_\_\_\_ **CONTENT – MISCELLANEOUS (20)** Does the paper describe other features of the snowmobile? How will the modifications affect the cost of the snowmobile? Will the snowmobile be durable? Will the snowmobile be energy efficient? Will the snowmobile be safe to ride? Was rider comfort a major consideration?

\_\_\_\_\_ **RESULTS/DATA – (10)** Does the paper contain valid numerical data? Are results described based upon testing?

\_\_\_\_\_ **ORGANIZATION (10)** Is the paper format logical and organized? Did it contain an introduction/overview as well as conclusion/summary? Did the paper conform to the SAE standard format for technical papers?

\_\_\_\_\_ **USE OF GRAPHICS – TABLES/GRAPHS/PICTURES (10) -** Were graphics used in the paper? Were they clearly explained in the text? Were they legible? Were they effective?

\_\_\_\_\_ **REFERENCES (5)** Are references cited whenever appropriate? Were the references from high-quality sources?

\_\_\_\_\_ **TOTAL = ENGINEERING DESIGN PAPER POINTS (100 points maximum)**

**COMMENTS:**



**APPENDIX C**  
**SAE CSC 2013 Oral Presentation judging form for ZE Sleds**

University Team Name: \_\_\_\_\_

Score the following categories on the basis of 0-12.5 points each according to the following scale (any number or fraction along this scale may be used).

0 = inadequate or no attempt  
2.5 = attempted but below expectation  
5 = average or expected

7.5 = above average but still lacking  
10 = excellent, meets intent  
12.5 = extraordinary, far exceeds expectations

\_\_\_\_\_ **CONTENT (SNOWMOBILE OPERATOR PERSPECTIVE):** Does the presentation describe how the design will appeal to scientists working in the North and South Pole areas? Will the snowmobile have sufficient range and power? Is enough detail given about how? How have ergonomics been taken into account?

\_\_\_\_\_ **CONTENT (SNOWMOBILE DEALER/OUTFITTER PERSPECTIVE):** Does the presentation describe how the design will be serviced in the North and South Pole environment? Is the cost reasonable? Is the design durable and easy to maintain? Does the design allow operation by a novice snowmobiler? Is enough detail given about how these goals are met? Was rider comfort a major consideration?

\_\_\_\_\_ **CONTENT (ENVIRONMENTAL PERSPECTIVE):** Does the presentation describe how the design will minimize the environmental impacts of the snowmobile? How much? Is the snowmobile quiet enough? How quiet? Is enough detail given about how these goals are met? Are there other factors that make this design more attractive from an environmental perspective?

\_\_\_\_\_ **CONTENT (TEST RESULTS/SCIENCE):** Are test results given for all of the “claims” made about the modified snowmobile? Is the presentation based on “good science” (as opposed to a slick sales job)? Is data provided to support all conclusions?

\_\_\_\_\_ **ORGANIZATION:** Were the concepts presented in a logical order progressing from basic concept and showing how the engineering accomplished the concept? Was it clear to the audience what was to be presented and what was coming next? Were distinct introduction and overviews as well as summary and conclusions given?

\_\_\_\_\_ **VISUAL AIDS:** Were visual aids used? Was the text readable? Were illustrations, graphs, and tables clearly explained? Were the visual aids effective?

\_\_\_\_\_ **DELIVERY:** Did the presenter speak in a clear voice? Did the presenter show enthusiasm and promote confidence in the technical aspects? Did he/she maintain eye contact?

\_\_\_\_\_ **QUESTIONS:** Did the answer illustrate that the team fully understood the question? Is there doubt that the team understood the answer? Did the team promote complete confidence in their response to the questions?

\_\_\_\_\_ **TOTAL = PRESENTATION POINTS (100 points maximum)**

**COMMENTS:**



**APPENDIX D**  
**SAE CSC 2013 Handling Event Judging Form for ZE Sleds**

University Team Name: \_\_\_\_\_

Score the following categories, giving each points ranging from 0 (very bad) to the maximum points available for the category (excellent). The maximum points available for each category are listed in parenthesis.

\_\_\_\_\_ **CORNERING (5):** Does the sled have solid steering? Is handling responsive? Do you have confidence that the sled will go where you point it?

\_\_\_\_\_ **RIDE (5):** Does the sled impress you as rideable? Could you ride this sled all day and be comfortable? Is sled ride consistent and smooth?

\_\_\_\_\_ **ENGINE RESPONSE (7.5):** Is the engine response quick and sure? Do RPM's increase/decrease quickly and smoothly? Is there any hesitation to increase RPM?

\_\_\_\_\_ **CLUTCH/TRACTION (7.5):** Does the clutch engage smoothly? Does the drive train put power to the snow well?

\_\_\_\_\_ **BRAKING (7.5):** Do the brakes engage properly? Are you confident the brakes will perform in an emergency situation?

\_\_\_\_\_ **BALANCE (7.5):** Is the sled balanced front to back and side to side? Is the sled nose heavy? Does it torque to the side?

\_\_\_\_\_ **OVERALL PERFORMANCE (10):** Do all parts of the performance seem to fit together? Are the controls simple and easy to operate? Are the handlebars, seat, and footrest comfortable and well laid out?

\_\_\_\_\_ **TOTAL HANDLING EVENT POINTS (50 points maximum)**

**COMMENTS:**

---

---

---

---

---

---

---

---

---

---

**Judge Name** \_\_\_\_\_



**APPENDIX H  
CSC 2013 INSPECTION FORMS**

*Will be available on the forum before competition.*



## APPENDIX S SAE TECHNICAL STANDARDS

The SAE Technical Standards Board (TSB) has made the following SAE Technical Standards available on line, **at no cost**, for use by Collegiate Design teams. Standards are important in all areas of engineering and we urge you to review these documents and to become familiar with their contents and use.

The technical documents listed below include both (1) standards that are identified in the rules and (2) standards that the TSB and the various rules committees believe are valuable references or which may be mentioned in future rule sets.

All Collegiate Design Series teams registered for competitions in North America have access to all the standards listed below - including standards not specific to your competition.

See Clean Snowmobile Challenge Rule A2.20 "Technical Standards Access" for the access procedure.

### **SAE Technical Standards included in the CDS Rules**

#### **Baja SAE**

- J586 - Stop Lamps for Use on Motor Vehicles Less Than 2032 mm in Overall Width
- J759 - Lighting Identification Code
- J994 - Alarm - Backup – Electric Laboratory Tests
- J1741 - Discriminating Back-Up Alarm Standard

#### **Clean Snowmobile Challenge**

- J192 - Maximum Exterior Sound Level for Snowmobiles
- J1161 - Sound Measurement – Off-Road Self-Propelled Work Machines Operator-Work Cycle

#### **Formula Hybrid**

- J1318 - Gaseous Discharge Warning Lamp for Authorized Emergency, Maintenance and Service Vehicles
- J1673 - High Voltage Automotive Wiring Assembly Design

#### **Formula SAE**

- SAE 4130 steel is referenced but no specific standard is identified
- SAE Grade 5 bolts are required but no specific standard is identified

#### **Supermileage**

- J586 - Stop Lamps for Use on Motor Vehicles Less Than 2032 mm in Overall Width

### **SAE Technical Standards for Supplemental Use**

#### **Standards Relevant to Baja SAE**

- J98 – Personal Protection for General Purpose Industrial Machines – Standard
- J183 – Engine Oil Performance and Engine Service Classification - Standard
- J306 – Automotive Gear Lubricant Viscosity Classification - Standard
- J429 – Mechanical and Material Requirements for Externally Threaded Fasteners – Standard





J512 – Automotive Tube Fittings - Standard  
J517 – Hydraulic Hose - Standard  
J1166 – Sound Measurement – Off-Road Self-Propelled Work Machines Operator-Work Cycle  
J1194 – Rollover Protective Structures (ROPS) for Wheeled Agricultural Tractors  
J1362 – Graphical Symbols for Operator Controls and Displays on Off-Road Self-Propelled Work Machines - Standard  
J1614 – Wiring Distribution Systems for Construction, Agricultural and Off-Road Work Machines  
J1703 - Motor Vehicle Brake Fluid - Standard  
J2030 – Heavy Duty Electrical Connector Performance Standard  
J2402 – Road Vehicles – Symbols for Controls, Indicators and Tell-Tales - Standard

### **Standards Relevant to Clean Snowmobile Challenge**

J44 – Service Brake System Performance Requirements – Snowmobiles - Recommended Practice  
J45 – Brake System Test Procedure – Snowmobiles – Recommended Practice  
J68 – Tests for Snowmobile Switching Devices and Components - Recommended Practice  
J89 – Dynamic Cushioning Performance Criteria for Snowmobile Seats - Recommended Practice  
J92 – Snowmobile Throttle Control Systems – Recommended Practice  
J192 – Maximum Exterior Sound Level for Snowmobiles - Recommended Practice  
J288 – Snowmobile Fuel Tanks - Recommended Practice  
J1161 – Operational Sound Level Measurement Procedure for Snowmobiles - Recommended Practice  
J1222 – Speed Control Assurance for Snowmobiles - Recommended Practice  
J1279 – Snowmobile Drive Mechanisms - Recommended Practice  
J1282 – Snowmobile Brake Control Systems - Recommended Practice  
J2567 – Measurement of Exhaust Sound Levels of Stationary Snowmobiles - Recommended Practice

### **Standards Relevant to Formula SAE**

J183 – Engine Oil Performance and Engine Service Classification - Standard  
J306 – Automotive Gear Lubricant Viscosity Classification - Standard  
J429 – Mechanical and Material Requirements for Externally Threaded Fasteners – Standard  
J452 - General Information – Chemical Compositions, Mechanical and Physical Properties of SAE Aluminum Casting Alloys – Information Report  
J512 – Automotive Tube Fittings - Standard  
J517 – Hydraulic Hose - Standard  
J637 – Automotive V-Belt Drives – Recommended Practice  
J829 – Fuel Tank Filler Cap and Cap Retainer  
J1153 - Hydraulic Cylinders for Motor Vehicle Brakes – Test Procedure  
J1154 – Hydraulic Master Cylinders for Motor Vehicle Brakes - Performance Requirements - Standard  
J1703 - Motor Vehicle Brake Fluid - Standard  
J2045 – Performance Requirements for Fuel System Tubing Assemblies - Standard  
J2053 – Brake Master Cylinder Plastic Reservoir Assembly for Road Vehicles - Standard

### **Standard Relevant to Formula Hybrid**

J1772 – SAE Electric Vehicle and Plug in Hybrid Conductive Charge Coupler



**Standard Relevant to all CDS Competitions**

J1739 – Potential Failure Mode and Effects Analysis in Design (Design FMEA) Potential Failure Mode and Effects Analysis in Manufacturing and Assembly Processes (Process FMEA) and Potential Failure Mode and Effects Analysis for Machinery (Machinery FMEA)